

MUNI  
PHARM

# Electrochemistry I


Physical chemistry

# Basic concepts

**Electrochemistry** – studies the relationship between electric and chemical phenomena. Electrochemistry deals with the interaction between **electrical energy and chemical change**.

**Ions** – positively or negatively charged particles which move in the solution by applying electrical fields.

**Electrolyte** – allow passage of electrical current by movement of ions in solution (conductors classe II). **Strong electrolytes:** solution completely dissociated into ions. **Weak electrolytes:** solution dissociated only partially ( $pK_a$ ).

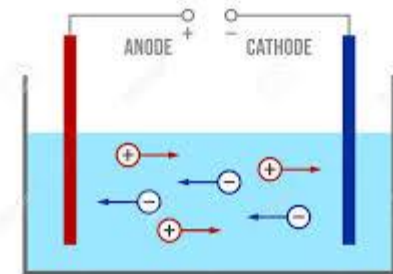

# Conductivity in liquids

**Conductivity** is related with **transfer of ions due to electric field**.

When the voltage is inserted on electrodes, the ions start to move toward the electrodes.

Ability of conductor transfer electric current is characterized by its **resistance R** (Ohm's law  $R = U/I$ ).

**Electric conductance:**


$$\mathbf{G} = \mathbf{1/R} \quad [\Omega^{-1}, \text{Siemens S}]$$

**Specific conductance** (conductivity):

$$\mathbf{\kappa} = (\mathbf{d/S}) * \mathbf{G} \quad [\Omega^{-1}\text{m}^{-1}, \text{Sm}^{-1}]$$



S – surface of electrode; d – distance between electrodes

**d/S** – instrument constant

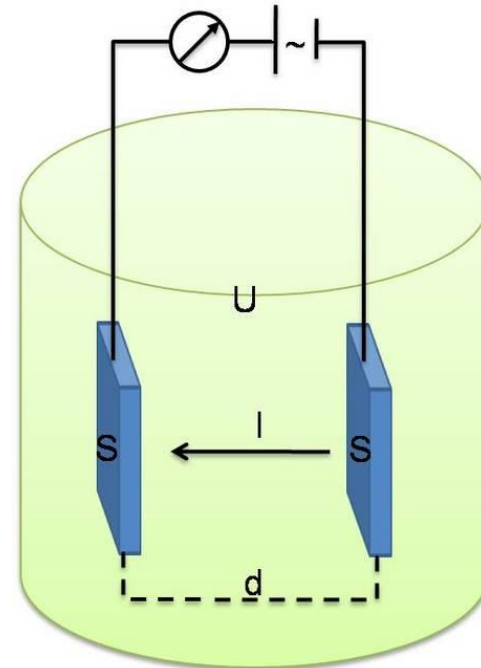

# Factors influencing the conductivity

1. Concentration of ions
2. Type of the electrolyte
3. Measurement conditions  
(e.g. temperature, viscosity of the solvent)

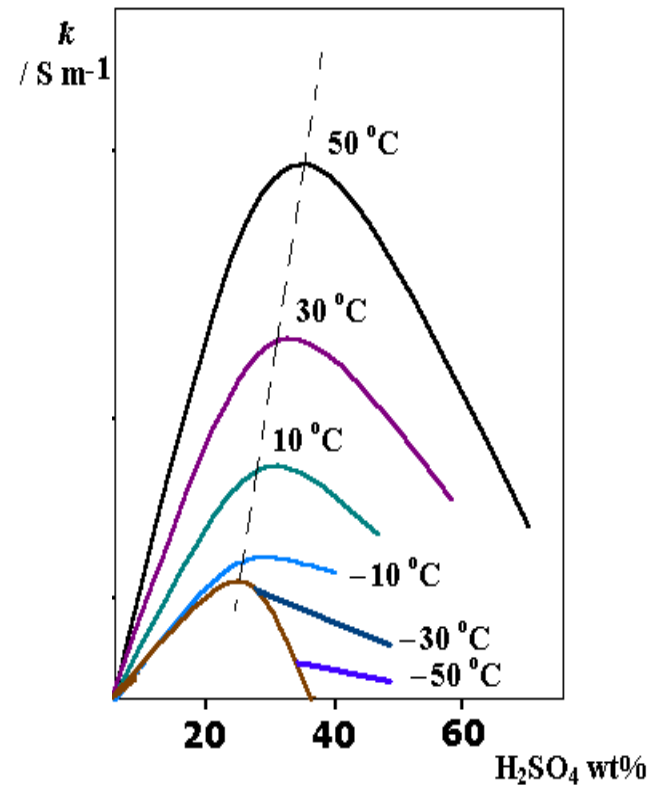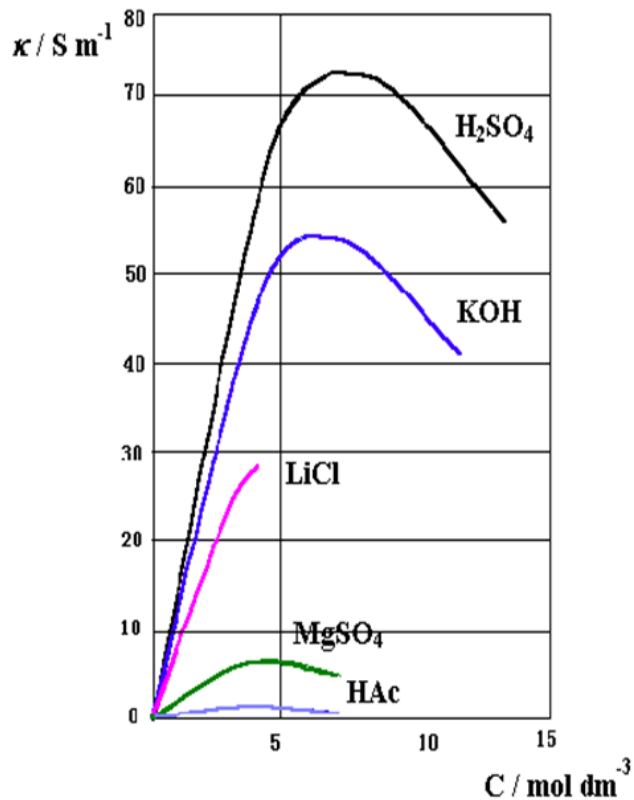


# Molar conductivity

- The conductivity of a solution is approximately proportional to the concentration:

$$\Lambda_m = \frac{K}{C} \quad [\Omega^{-1} \text{ m}^2 \text{ mol}^{-1}]$$

The molar conductivity depends on the concentration (decreases with increasing concentration).

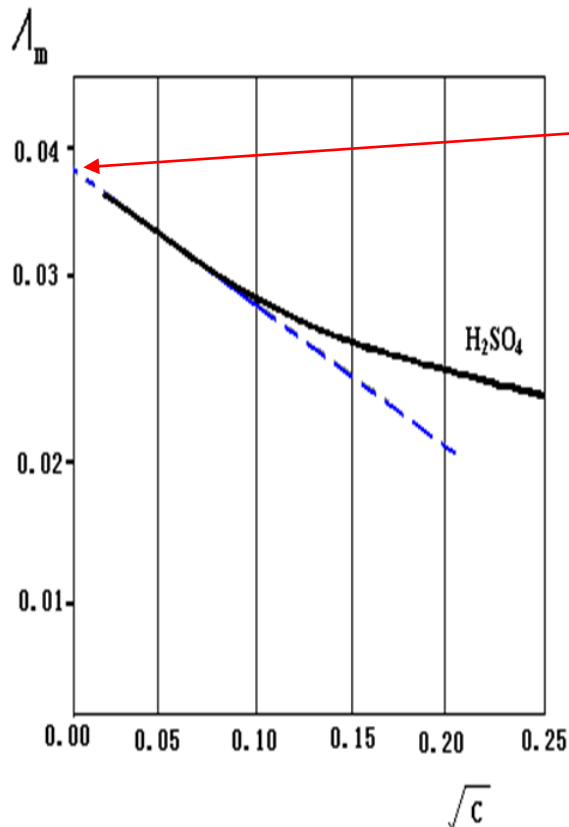

**Limit molar conductivity  $\lambda_m^0$**   
- constant for a given electrolyte  
(molar conductivity at  $c \rightarrow 0$ ).

**Kohlrausch relationship:**

$$\Lambda_m = \Lambda_m^0 - A\sqrt{c}$$

A – empirical constant

# Limit molar conductivity

## Kohlrausch law of independent migration of ions

Limit molar conductivity of the electrolyte is the sum of limit molar conductivities of ions.

$$\Lambda_m^0 = \lambda_{m+}^0 + \lambda_{m-}^0$$

**The difference between values of limit molar conductivity of solutions of different salts which have the same cation or anion don't depend on the nature of this common ion.**

$\lambda_m^0$	K <sup>+</sup>	Na <sup>+</sup>	Tl <sup>+</sup>
Cl <sup>-</sup>	130.1	109.0	131.5
NO <sub>3</sub> <sup>-</sup>	126.5	105.3	127.5
F <sup>-</sup>	111.3	90.1	112.5

difference ca 3.8

difference ca 15


difference ca 21

difference ca 22.5

# Limit molar conductivity

Factors influencing  $\lambda_m^0$  :

1. The nature of the ion
  - a) charge
  - b) radius
  - c) transport mechanism

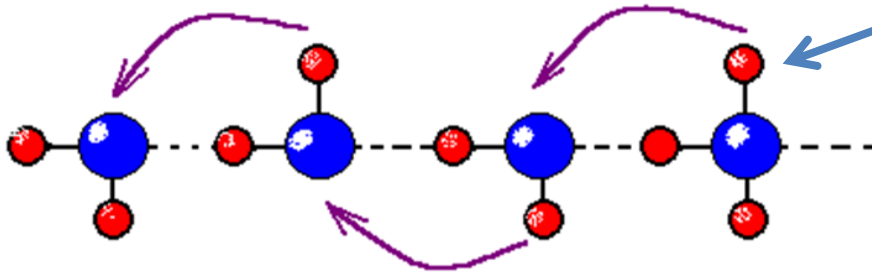

The proton from  $\text{H}_3\text{O}^+$  is taken by a water molecule and new  $\text{H}_3\text{O}^+$  is formed. Transferring of the proton will be much faster than the transport of whole large ion  $\text{H}_3\text{O}^+$ .



2. Measurement conditions (e.g. temperature, viscosity of the solvent)

# Application

## 1. Conductometric titration

- can be used for indication of equivalence point:

- in the formation of non-conductive particles from ions (**neutralization, precipitation**)
- where there is an exchange of particles with different molar conductivity (**complexation** r.).

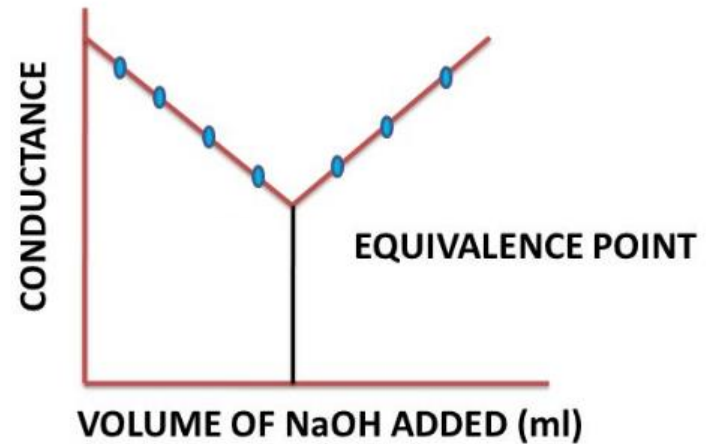

2. **Direct conductometry** - Determining the concentration of the electrolyte. Conductivity is not specific to individual ions. Used mainly for determination of trace concentrations of ions in solution (**control water purity according to Ph. Eur.** - purified and highly purified water).

3. **Determining the solubility** of slightly soluble salts

4. **Determining the degree of dissociation** ( $\alpha$ ): with increasing concentration of weak electrolyte conductivity decreases (decrease dissociation),  $\lambda = \lambda^0 \alpha$



# Basic concepts


**Redox reactions** – (oxidation-reduction) are chemical reactions in which the oxidation state of atoms is changing. Each redox reaction is composed of two half-reactions (oxidation and reduction) which occur simultaneously. In the **oxidation**, the oxidation number of an atom increases, thus **atom loses electrons**, in the **reduction** the oxidation number decreases, thus **atom accepts electrons**.

**Electrode** - an electrical conductor in contact with the non-metallic parts of the electrical circuit (e.g. electrolyte). In electrochemistry, the **cathode** is defined as the electrode at which **reduction** takes place, and the **anode** is the electrode at which **oxidation** occurs. Each of the two electrodes may have a different charge (+ or -), depending on whether it is an **electrolytic cell** (electrolysis – we put the voltage on the electrodes), or **galvanic cell** (spontaneous process).


# Basic concepts

**Galvanic cell** – Transform the chemical energy to the electrical energy. After connecting the galvanic cell in the electrical circuit, the reactions take place inside the cell, which gradually reduces the electrical energy stored in a galvanic cell - the cell is discharging. These reactions may be irreversible (primary cells) or reversible - cell can be recharged (battery).

**Electrolytic cell** – Transform the electrical energy to the chemical energy. Is caused by passage of electric current in liquid in which chemical changes occurs on the electrodes. The electrochemical reaction takes place in the opposite direction than in galvanic cell.

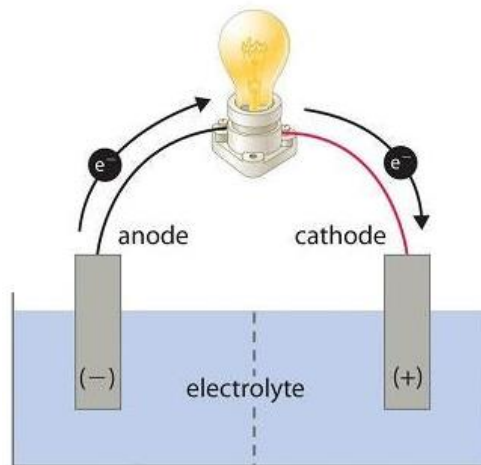


GALVANIC CELL

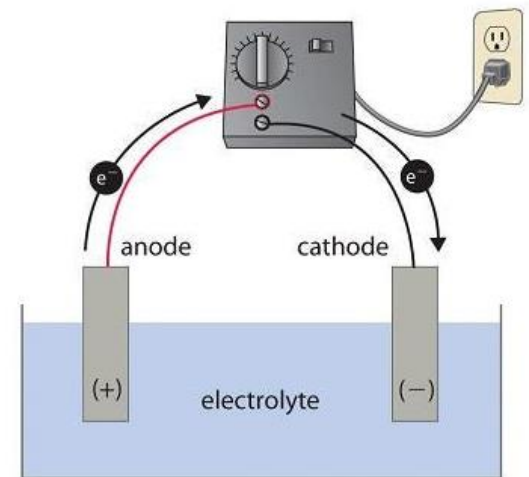




ELECTROLYTIC CELL

# Electrode potential

The formation of the electrode potential is based on reaction occurring on the surface of the electrode.

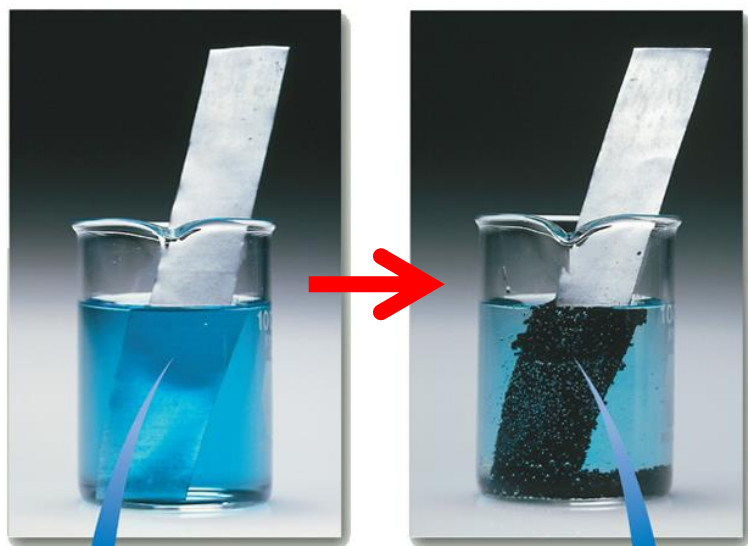

There is a **potential difference** between the two phases (metal and solution).

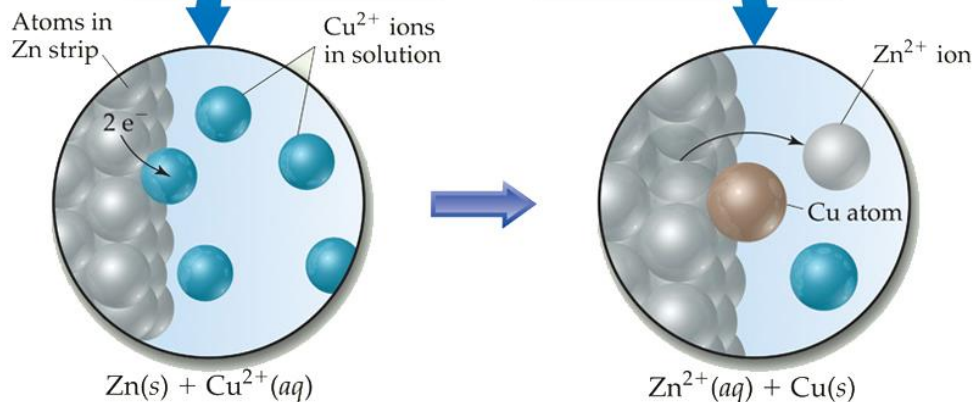


This **redox reaction** occurs due to the potential difference between the metal and the solution.

# Galvanic cell


- in an electrolyte solution are immersed **two different electrodes** (two electrodes are need to connect the electrical circuit), which are charged against the solution to different charge (+/-), the system may produce a **electrical work** (voltage).

The electrodes may have a common electrolyte solution or the solutions can be different. If the electrolyte solutions are different, must be electrically connected (**salt bridge** or **diaphragm**).

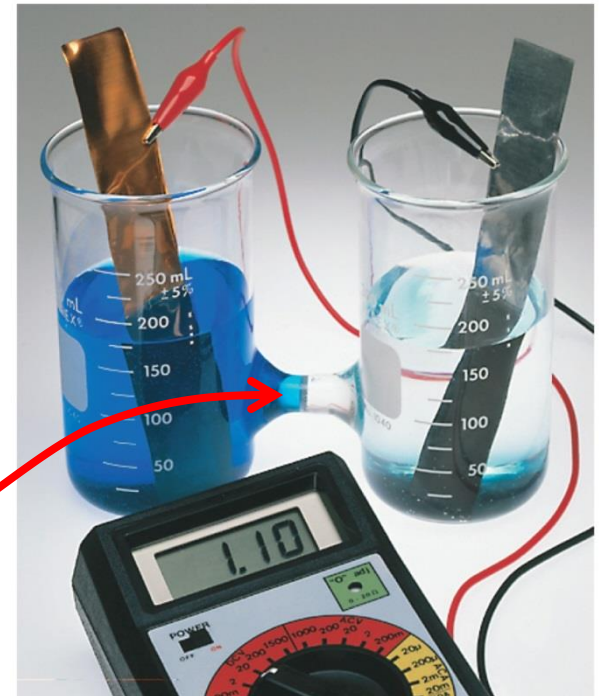


# Galvanic cell

**Anode**





Cations ( $\text{Zn}^{2+}$ ) migrate to the cathode

**Cathode**



Anions (sulfate) migrate to the anode

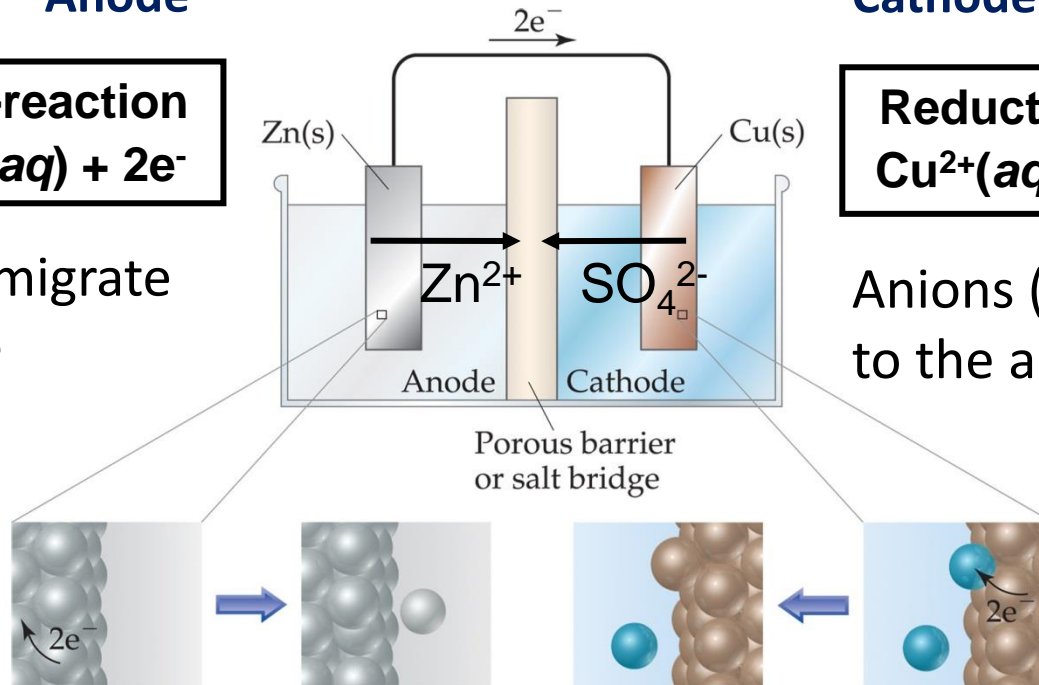

# Galvanic cell

Schematic writing of the cell (Daniell cell):

The **anode** reaction is written on the **left**.

The **cathode** reaction is written on the **right**.



↑  
The single line shows a phase boundary between the components of a half-cell.

↑  
The double line shows that the half-cells are physically separated (diaphragm).

If needed, concentrations of dissolved components are given in parentheses. (If not stated, it is assumed that they are 1 M.)



# Electrode potential



The spontaneous reaction occurs as a result of the **different abilities of metals to give up their electrons**.

Zn is a **stronger reducing agent** than Cu.

Zn has a **higher potential energy** than Cu. When the electrodes are connected, the flow of  $e^-$  from Zn to Cu equalize the difference in electrical potential.



**The electrode potential  $E$  depends upon:**

- the nature of the metal and its ions,**
- the concentration of the ions in the electrolyte,
- the temperature


The difference in electrical potential between the two electrodes is called **electromotive force (EMF)**.

# Electromotive forces EMF

The electromotive forces is the maximum voltage of the galvanic cell (so called cell potential).

$$\text{EMF} = E (\text{cathode}) - E (\text{anode})$$

EMF > 0 for a spontaneous process

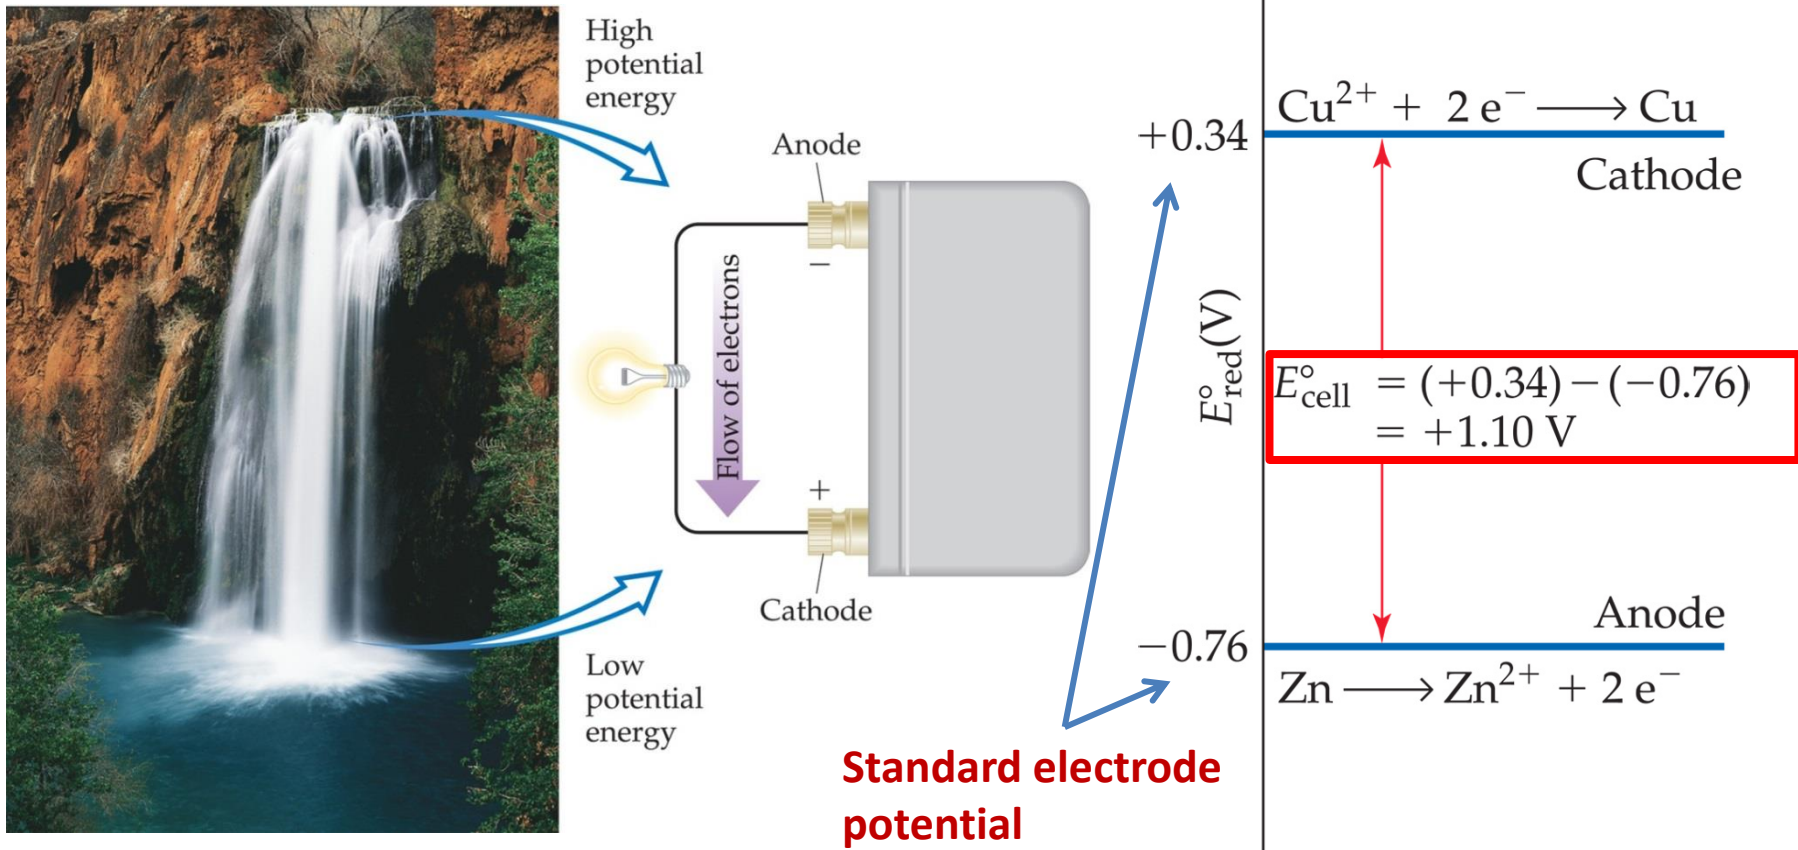



# Standard Electrode Potentials $E^0$

The standard electrode potential ( $E^{\circ}_{\text{half-cell}}$ ) is the potential of a given half-reaction when **all components are in their standard states** (unit activity of all components, temperature 273.15 K = 0 °C).

Since a half cell in an electrochemical cell can work only in combination with the other half cell and does not work independently, **it is not possible to determine the absolute electrode potential** of an electrode. We can, therefore, find only the relative electrode potential.

This difficulty can be solved by selecting one of the electrodes as a **reference electrode** and arbitrarily fixing the potential of this electrode as zero. For this purpose, reversible hydrogen electrode has been universally accepted as a reference electrode (**standard hydrogen electrode**, S.H.E).

$$E^{\circ}_{\text{cell}} = E^{\circ}_{\text{cathode (reduction)}} - E^{\circ}_{\text{anode (oxidation)}}$$

$E^{\circ}$  is the electromotive force of an electrochemical cell consisting of an electrode in the standard state and the standard hydrogen electrode.

# Standard Reduction Potentials

Ox. agent strength increases



Reduction Half-Reaction	$E^\circ$ (V)
$\text{F}_2(\text{g}) + 2\text{e}^- \rightarrow 2\text{F}^-(\text{aq})$	2.87
$\text{Au}^{3+}(\text{aq}) + 3\text{e}^- \rightarrow \text{Au}(\text{s})$	1.50
$\text{Cl}_2(\text{g}) + 2\text{e}^- \rightarrow 2\text{Cl}^-(\text{aq})$	1.36
$\text{Cr}_2\text{O}_7^{2-}(\text{aq}) + 14\text{H}^+(\text{aq}) + 6\text{e}^- \rightarrow 2\text{Cr}^{3+}(\text{aq}) + 7\text{H}_2\text{O}$	1.33
$\text{O}_2(\text{g}) + 4\text{H}^+ + 4\text{e}^- \rightarrow 2\text{H}_2\text{O}(\text{l})$	1.23
$\text{Ag}^+(\text{aq}) + \text{e}^- \rightarrow \text{Ag}(\text{s})$	0.80
$\text{Fe}^{3+}(\text{aq}) + \text{e}^- \rightarrow \text{Fe}^{2+}(\text{aq})$	0.77
$\text{Cu}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Cu}(\text{s})$	0.34
$\text{Sn}^{4+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Sn}^{2+}(\text{aq})$	0.15
$2\text{H}^+(\text{aq}) + 2\text{e}^- \rightarrow \text{H}_2(\text{g})$	0.00
$\text{Sn}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Sn}(\text{s})$	-0.14
$\text{Ni}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Ni}(\text{s})$	-0.23
$\text{Fe}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Fe}(\text{s})$	-0.44
$\text{Zn}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Zn}(\text{s})$	-0.76
$\text{Al}^{3+}(\text{aq}) + 3\text{e}^- \rightarrow \text{Al}(\text{s})$	-1.66
$\text{Mg}^{2+}(\text{aq}) + 2\text{e}^- \rightarrow \text{Mg}(\text{s})$	-2.37
$\text{Li}^+(\text{aq}) + \text{e}^- \rightarrow \text{Li}(\text{s})$	-3.04

Red. agent strength increases




# Standard Hydrogen Electrode

By definition, the reduction potential for S.H.E is 0.0 V:



$$E^0 (\text{H}_3\text{O}^+/\text{H}_2) = 0$$






SHE electrode is formed of platinum coated with platinum black, aerated with hydrogen gas under pressure of 101 325 Pa at a temperature of 273.15 K, immersed in a solution with a unit activity of hydrogen ions ( $\text{H}^+$ ) = 1

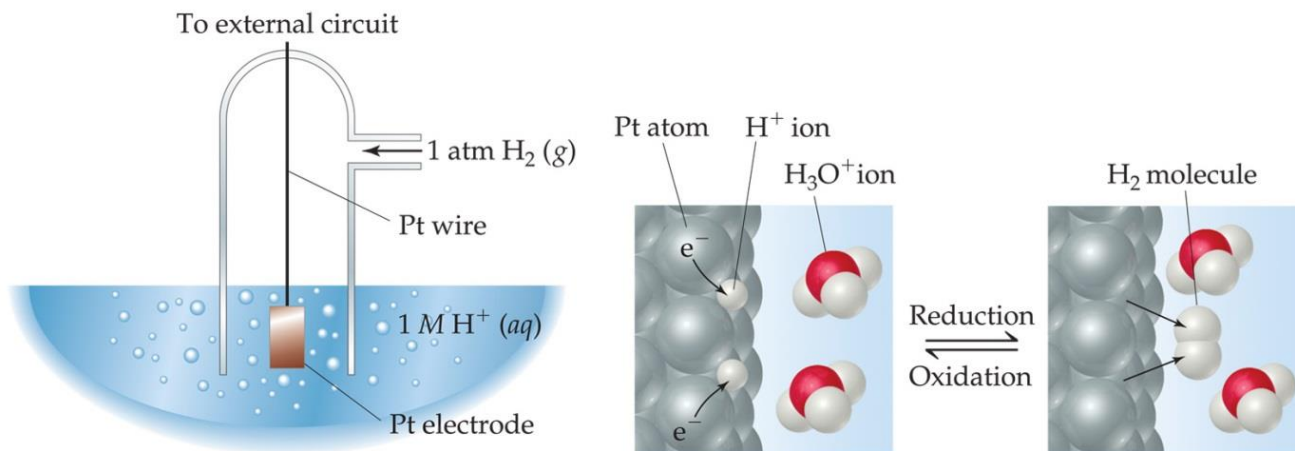

# Standard Hydrogen Electrode

$$\text{EMF} = E(\text{cathode}) - E(\text{anode})$$


$$E^0 = E^0_{\text{cathode}} (0 \text{ V}) - E^0_{\text{anode}} (0.76 \text{ V}) = -0.76 \text{ V}$$

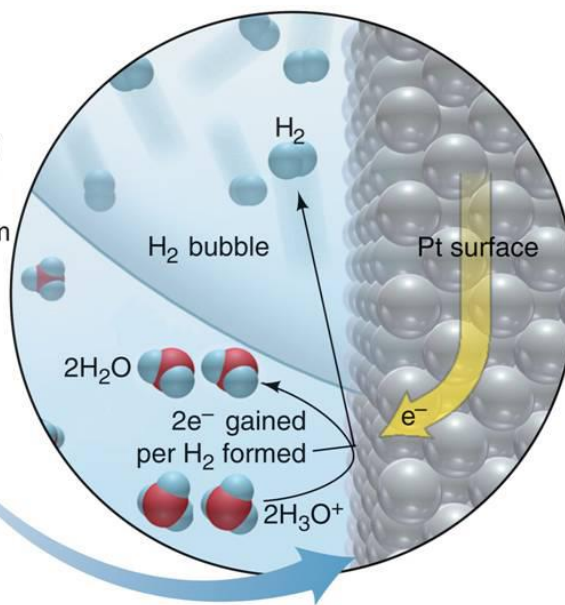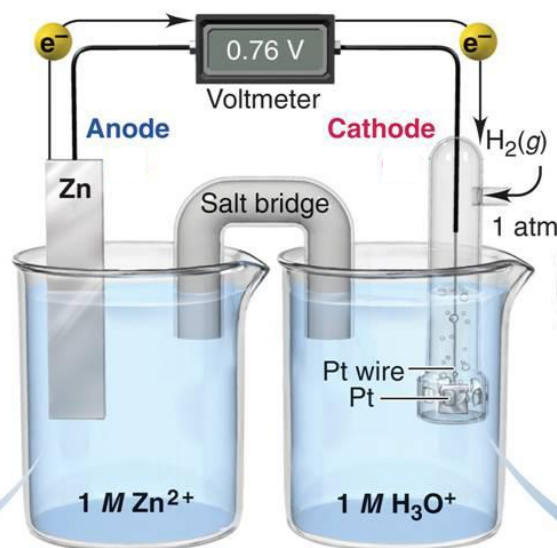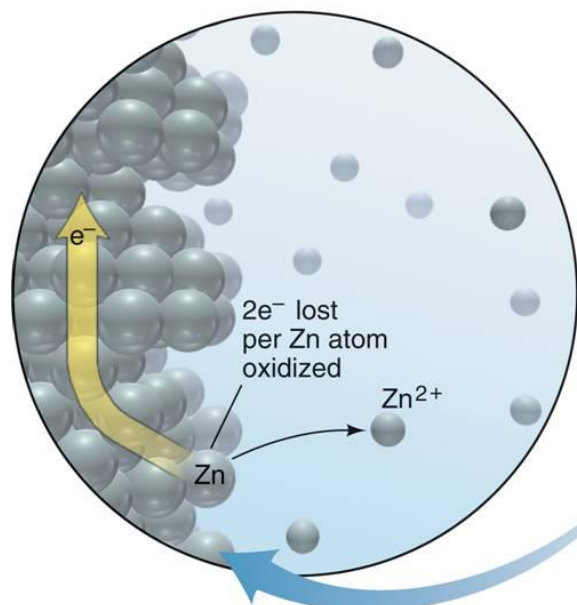

Overall (cell) reaction



# Standard Hydrogen Electrode

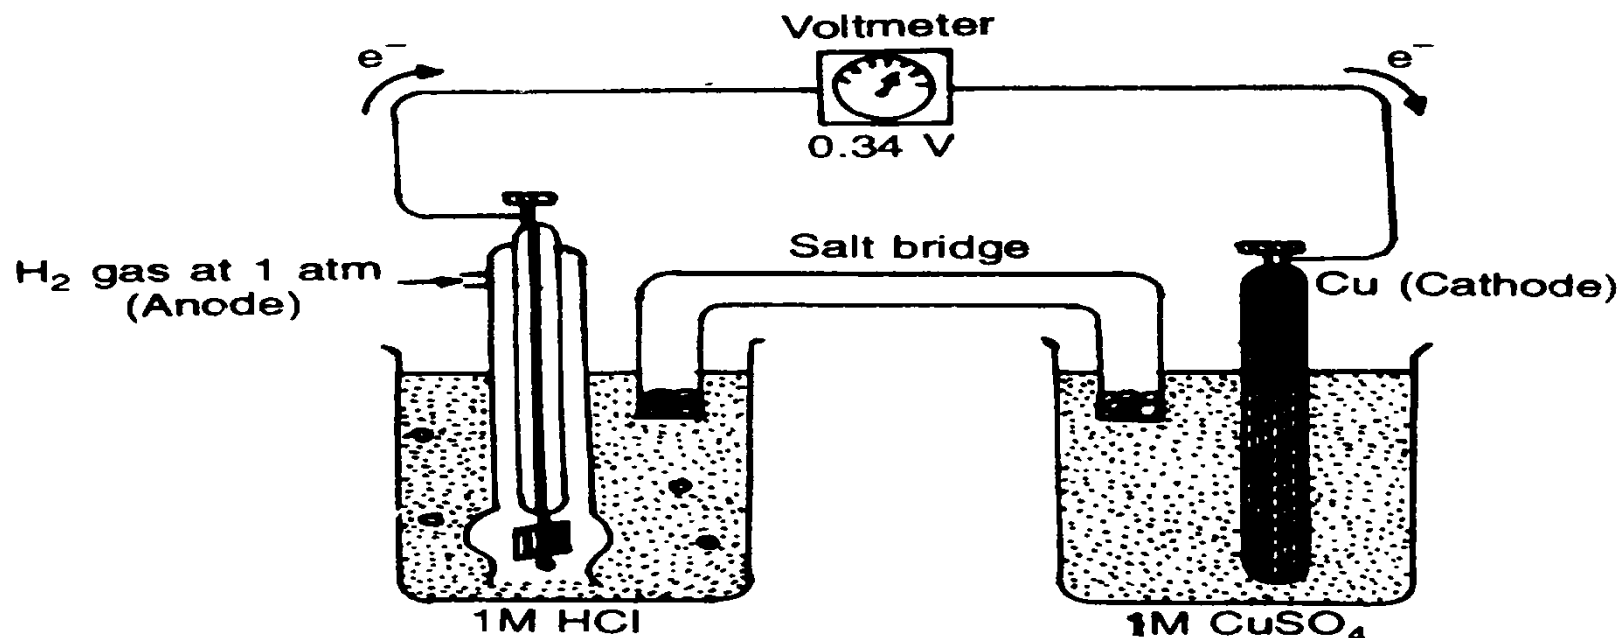

The cell potential has been measured to be 0.34 V.

$$\text{EMF} = E (\text{cathode}) - E (\text{anode})$$

$$E^0 = E^0_{\text{cathode}} (0.34 \text{ V}) - E^0_{\text{anode}} (0 \text{ V}) = 0.34 \text{ V}$$

Electrodes at which reduction occurs in connection with SHE have positive reduction potentials.

# Standard Reduction Potentials

Ox. agent strength increases




Reduction Half-Reaction	$E^\circ$ (V)
$F_2(g) + 2e^- \rightarrow 2F^-(aq)$	2.87
$Au^{3+}(aq) + 3e^- \rightarrow Au(s)$	1.50
$Cl_2(g) + 2e^- \rightarrow 2Cl^-(aq)$	1.36
$Cr_2O_7^{2-}(aq) + 14H^+(aq) + 6e^- \rightarrow 2Cr^{3+}(aq) + 7H_2O$	1.33
$O_2(g) + 4H^+ + 4e^- \rightarrow 2H_2O(l)$	1.23
$Ag^+(aq) + e^- \rightarrow Ag(s)$	0.80
$Fe^{3+}(aq) + e^- \rightarrow Fe^{2+}(aq)$	0.77
$Cu^{2+}(aq) + 2e^- \rightarrow Cu(s)$	0.34
$Sn^{4+}(aq) + 2e^- \rightarrow Sn^{2+}(aq)$	0.15
$2H^+(aq) + 2e^- \rightarrow H_2(g)$	0.00
$Sn^{2+}(aq) + 2e^- \rightarrow Sn(s)$	-0.14
$Ni^{2+}(aq) + 2e^- \rightarrow Ni(s)$	-0.23
$Fe^{2+}(aq) + 2e^- \rightarrow Fe(s)$	-0.44
$Zn^{2+}(aq) + 2e^- \rightarrow Zn(s)$	-0.76
$Al^{3+}(aq) + 3e^- \rightarrow Al(s)$	-1.66
$Mg^{2+}(aq) + 2e^- \rightarrow Mg(s)$	-2.37
$Li^+(aq) + e^- \rightarrow Li(s)$	-3.04

Red. agent strength increases



## Sample Problem 1: Calculate an unknown $E^\circ_{\text{half-cell}}$ from $E^\circ_{\text{cell}}$

The galvanic cell reaction takes place:



Calculate  $E^\circ_{\text{bromine}}$ ,  $E^\circ_{\text{Zn}} = -0.76 \text{ V}$




$$E^\circ_{\text{cell}} = E^\circ_{\text{cathode}} - E^\circ_{\text{anode}}$$

$$1.83 = E^\circ_{\text{bromine}} - (-0.76)$$

$$1.83 - 0.76 = E^\circ_{\text{bromine}}$$


$$\boxed{E^\circ_{\text{bromine}} = 1.07 \text{ V}}$$

## Sample Problem 2: Using half-reactions to write a spontaneous redox reaction and calculating $E^\circ_{\text{cell}}$





Here the  $\text{Ag}^+/\text{Ag}$  half-reaction has the more positive  $E^\circ$  value  $\Rightarrow$  reduction reaction (cathode).

We reverse the  $\text{Sn}^{2+}/\text{Sn}$  half-reaction, but we do not reverse the sign:



The number of electrons in both half-reaction must be the same ( $E^\circ$  is unchanged):



$$E^\circ_{\text{cell}} = E^\circ_{\text{cathode (reduction)}} - E^\circ_{\text{anoda (oxidation)}}$$

$$E^\circ_{\text{cell}} = E^\circ_{\text{Ag}} - E^\circ_{\text{Sn}} = 0.80 - (-0.14) = \mathbf{0.94 \text{ V}}$$



# Nernst equation

The electrode potential depends on the temperature and electrolyte concentration.

$$E = E^\circ - \frac{RT}{nF} \ln \frac{a_{\text{red}}}{a_{\text{ox}}}$$

In the case of solid phase (metal) the concentration is unit:

$$E = E^\circ - \frac{RT}{nF} \ln \frac{1}{[M^{n+}]}$$

or

$$2.3 \frac{RT}{F} = 0.059 \text{ (at 298.15 K)}$$

$$E = E^\circ + \frac{0.059}{n} \log [M^{n+}]$$

**Sample Problem 3: Determine the electrode potential of the zinc electrode; electrolyte concentration is 0.5 mol/l at 0 ° C.**

$$\mathbf{E = E^\circ + RT / (zF) * \ln c} = -0.76 + [8.314 * 273.15 / (2 * 9.65 * 10^4)] * \ln 0.5 \\ = -0.763 + (-1574.17) / 193000 = -0.77 \text{ (V)}$$

**Sample Problem 4: What voltage will produce an electrochemical cell consisting of beryllium electrode immersed in the electrolyte Be<sup>2+</sup> (c=0.01 mol/l) and a silver electrode immersed in the electrolyte Ag<sup>+</sup> (c=0.05 mol/l) at 10 ° C?**


$$\mathbf{Be: E_1 = E^\circ + RT / (z F) * \ln c} = -1.85 + [8.314 * 283.15 / (2 * 9.65 * 10^4)] * \\ \ln 0.01 = -1.90 \text{ V}$$

$$\mathbf{Ag: E_2 = E^\circ + RT / (zF) * \ln c} = 0.80 + [8.314 * 283.15 / (1 * 9.65 * 10^4)] * \\ \ln 0.05 = 0.73 \text{ V (greater potential than Be => reduction => cathode)}$$


$$\mathbf{U = E_{cathode} - E_{anode} = 0.73 - (-1.90) = 2.63 \text{ V}}$$

## Nernst equation and equilibrium constant

The equilibrium constant **specifies the range of the electrochemical reaction** (if the  $K$  value is large, the reaction takes place extensively). The EMF of the cell may be used to calculate the equilibrium constant for the cell reaction. Consider the following redox reaction:



$$K = \frac{[\text{Zn}^{2+}(\text{aq})]}{[\text{Cu}^{2+}(\text{aq})]}$$

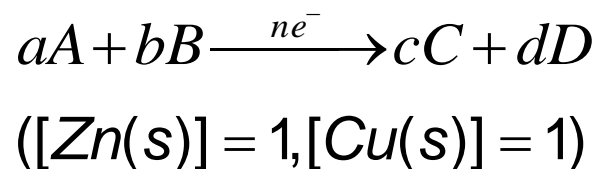

$$E = E^\circ - \frac{RT}{2F} \ln \frac{[\text{Zn}^{2+}(\text{aq})]}{[\text{Cu}^{2+}(\text{aq})]}$$

At equilibrium, the electrode potentials of the two electrodes become equal so that EMF of the cell is zero ( $E = 0$ ).

$$E^\circ = \frac{RT}{nF} \ln K$$

# Gibbs Free Energy and Electrical Work

The Gibbs free energy is the amount of "free" or "useful" energy available to do work (this maximum can be attained only in a completely reversible process).

For a spontaneous redox reaction  $\Delta G < 0$  and  $E_{\text{cell}} > 0$ .

$$\Delta G = -nFE_{\text{cell}}$$


Under standard conditions  $\Delta G^\circ = -nFE^\circ$

$$E^\circ = \frac{RT}{nF} \ln K$$

$$\Delta G^\circ = -nF \frac{RT}{nF} \ln K$$

$$\Delta G^\circ = -RT \ln K$$


# The interrelationship of $\Delta G^\circ$ , $E^\circ_{\text{cell}}$ , and $K$ .

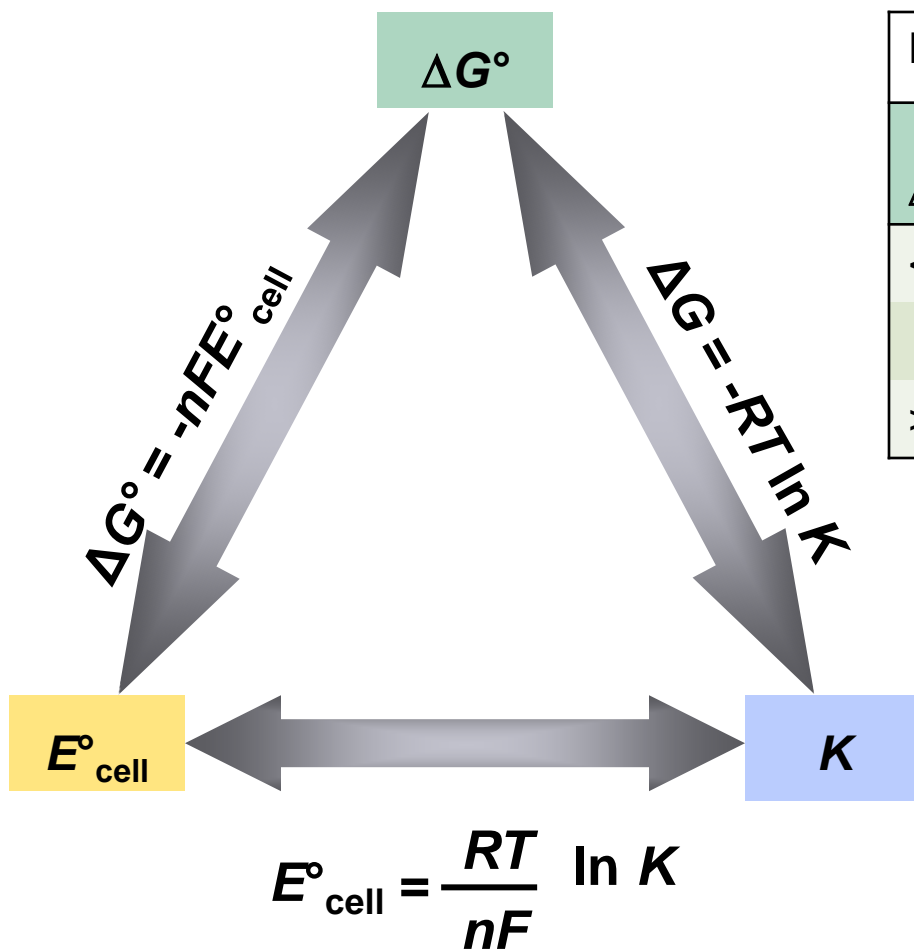

Reaction Parameters at the Standard State			
$\Delta G^\circ$	$K$	$E^\circ_{\text{cell}}$	Reaction at standard-state conditions
< 0	> 1	> 0	spontaneous
0	1	0	at equilibrium
> 0	< 1	< 0	nonspontaneous

# Concentration Cells


- Concentration cell uses the same electrodes and electrolytes but the concentration of electrolytes is different.
- Therefore, as long as the concentrations of electrolytes are different, E will not be 0 and the cell can do work.

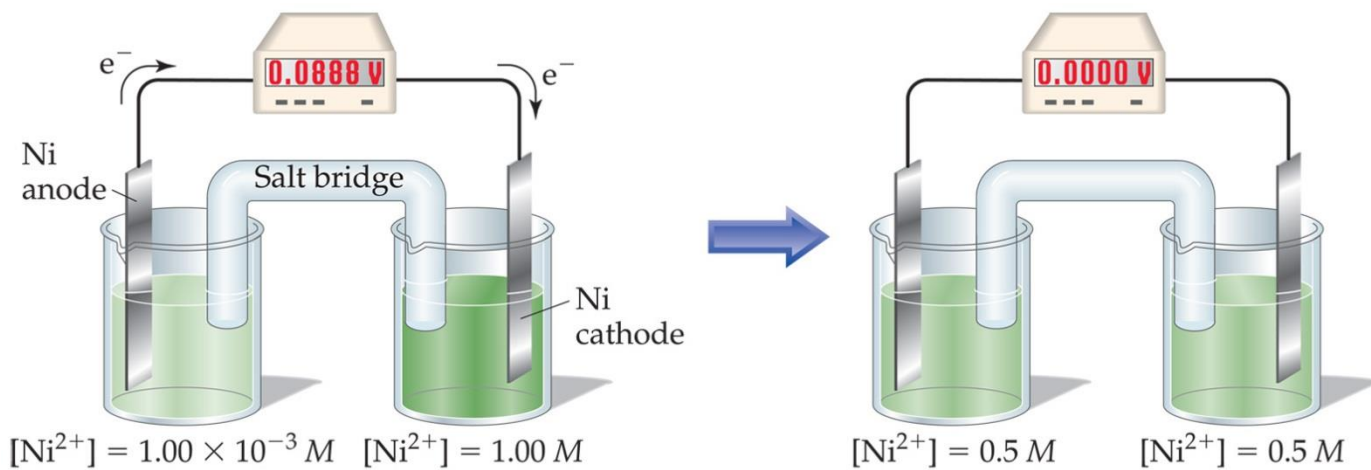

**oxidation**



**reduction**



**overall cell reaction**

