

## PA201

### Virtual Environments

#### Lecture 2

##### Virtual Reality Tracking

Fotis Liarokapis  
[liarokap@fi.muni.cz](mailto:liarokap@fi.muni.cz)

24<sup>th</sup> February 2020

## Motivation

- Different ways of interaction in VR
  - More natural
  - Higher level of immersion
  - Task performance
  - Control navigation
  - Control interaction
    - How do we track the objects/users?
    - How do we determine what the user sees?



<http://www.cise.ufl.edu/~lok/testing/vr-v09/tracking.pdf>

## Requirements

- Signaling
  - Button presses
  - Other user input
- Pose calculation
  - Position (x, y, z)
  - Orientation (yaw, pitch, roll)




<http://www.tmt.unw.edu.pl/journal/TMT2010/091-TMT10-029.pdf>

## DOF

- Degrees of freedom (DOF) are the set of independent displacements and/or rotations that specify completely the position and orientation of the body or system
- 1 DOF system
  - Volume control, speed control, sliding along a straight line etc
- 2 DOF system
  - Mouse, joystick, drawing tablet etc
- 3 DOF system
  - Position or orientation
- 6 DOF system
  - Position and orientation

## More DOFs

- More DOFs (more moving parts)
  - Human hand has 22 possible movements, so tracking it completely would be 22 DOF
    - Position, orientation, joints
  - Humans total over 100 DOF



[http://www.fkm.utm.my/~kusim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kusim/eng_design/vr/VR_Tracking.pdf)

## What to Track

- Head pose
- Hand pose
- Other body part(s)
- Other objects
- Trackers can do:
  - Only position
  - Only orientation
  - Both position and orientation



---

HCI LAB

---

## What to Track .

- If tracking of other body parts beside the head is required, their respective positions and orientations would be measured using special purpose tracking probes attached to the parts
- The body parts' locations could then be represented with respect to the head coordinate system

<https://pdfs.semanticscholar.org/c53/48128f9ef3383bdc4eb15fbadeaf3721d521.pdf>

---

HCI LAB

---

## Applications of Tracking

- Used in VR systems
  - Used in CAVEs
  - Not needed for VR training environments (e.g. flight simulators)
- Essential for AR systems
- Beneficial for geo-location
  - Positioning (e.g. "you are here")
  - Tracking (e.g. "where is my smartphone?")
  - Navigation (e.g. how to get from point A to point B)
  - Geo-fencing (e.g. turn off alarms in cinema)

<http://www.cs.tut.fi/courses/SGN-5406/lectures/V07-sensors.pdf>

---

HCI LAB

---

## Tracking Properties

---

HCI LAB

---

## Evaluation Criteria

- Data returned
- Spatial distortion (accuracy)
- Resolution
- Jitter (precision)
- Drift
- Lag
- Update Rate
- Range
- Interference and noise
- Mass, Inertia and Encumbrance
- Number of Tracked Points Durability
- Wireless
- Price



<http://www.cse.ufl.edu/~tolk/teaching/vr-v09/tracking.ppt>


---

HCI LAB

---

## Tracker Accuracy

- Difference between an object's pose and the reported pose
  - Separate for position and rotation
  - Not the same thing as resolution
    - Resolution is the minimum change that the sensor can detect
- Typically degraded with distance from the origin of the reference system of coordinates
  - Operating range



[http://www.fkm.utm.my/~kasim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kasim/eng_design/vr/VR_Tracking.pdf)


---

HCI LAB

---

## Tracker Jitter

- The change in tracker output when the tracked object is stationary
- A tracker with no jitter gives constant value as output if the object is stationary
- Should be minimized
- Unwanted effects in graphics
  - Tremor
  - Jumpy virtual objects
  - Can be filtered -> latency



[http://www.fkm.utm.my/~kasim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kasim/eng_design/vr/VR_Tracking.pdf)

---

HCI LAB

---

## Latency

- What makes up latency (or Lag)?
  - Acquisition
  - Transmission
  - Filtering
- Latency =  $t_1 - t_0$ 
  - where:
    - $t_0$  time when sensor is at point p
    - $t_1$  time when sensor reports p

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>


---

HCI LAB

---

## Tracker Drift and Latency

- Drift: the steady increase in tracker error with time
  - As time passes, the tracker inaccuracy grows

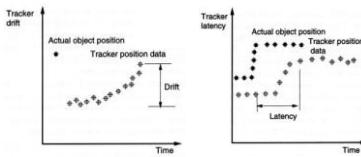

[http://www.fkm.utm.my/~kasm/eng\\_design/v/V0\\_Tracking.pdf](http://www.fkm.utm.my/~kasm/eng_design/v/V0_Tracking.pdf)

---

HCI LAB

---

## Update Rate

- Number of tracker position/orientation samples per second
  - High update rate != accuracy
  - Poor use of update information may result in more inaccuracy
  - Communication pathways and data packet size are important
  - Typically 30-240 datasets/s

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>


---

HCI LAB

---

## Multiplexing Effect

- If a tracker measures several objects, sampling rate can suffer
  - Multiplexing effect

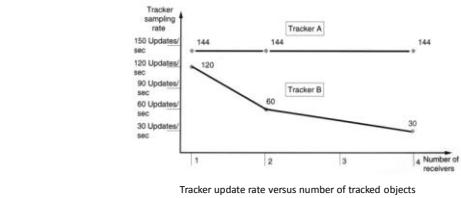

[http://www.fkm.utm.my/~kasm/eng\\_design/v/V0\\_Tracking.pdf](http://www.fkm.utm.my/~kasm/eng_design/v/V0_Tracking.pdf)

---

HCI LAB

---

## Range

- Position and orientation range could be different
- Sensitivity not uniform across all axis
- Working volume
  - What is the shape?
  - Accuracy decreases with distance
  - Range is inversely related to accuracy

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Interference and Noise

- Interference - external phenomenon that degrades system's performance
- Each type of tracker has different causes of interference/noise
  - Occlusion
  - Metal
  - Noise
  - Environmental
    - i.e door slamming, air conditioner, etc

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

# Principles


## Tracking Principles

- The six main principles of tracking operation include:
  - Time of flight (TOF)
  - Spatial scan
  - Inertial sensing
  - Mechanical linkages
  - Phase difference sensing
  - Direct-field sensing

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001 (<https://pdfs.semanticscholar.org/e53/081789bf3383bd4e9159b4ef3721d521f.pdf>)

## Time of flight (TOF)

- TOF systems rely on the measure of distance between features attached on one side to a reference and on the other side to a moving target
- These distances are determined by measuring the time of propagation of pulsed signals between pairs of points
  - Under the assumption that the speed of propagation of the signals is constant



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001 (<https://pdfs.semanticscholar.org/e53/081789bf3383bd4e9159b4ef3721d521f.pdf>)

## Spatial Scan

- Spatial scan trackers compute the position and the orientation of a target
  - The optical sensors are typically cameras
- The principle is based on either:
  - The analysis of 2D projections of image features
  - On the determination of sweep-beam angles

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001 (<https://pdfs.semanticscholar.org/e53/081789bf3383bd4e9159b4ef3721d521f.pdf>)


## Spatial Scan Configurations

- Outside-in systems employ video cameras that are placed on the reference and record features of the target
  - This technique is widely employed
- In an inside-out configuration the sensor is on the target and the emitters are on the reference



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001 (<https://pdfs.semanticscholar.org/e53/081789bf3383bd4e9159b4ef3721d521f.pdf>)

## Outside-In vs. Inside-Out Tracking

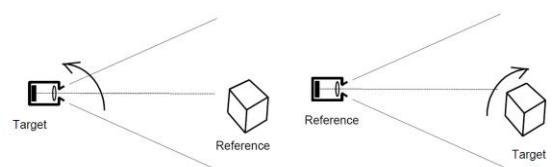


*Inside-out configuration:* The rotation of the camera held by the target in this case, produces a large motion of the image of the cube on the CCD camera.

*Outside-in configuration:* The rotation of the cube, the target in this case, produces a small motion of the image on the CCD camera.

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001 (<https://pdfs.semanticscholar.org/e53/081789bf3383bd4e9159b4ef3721d521f.pdf>)

HCI LAB

## Outside-In v.s. Inside-Out Tracking .

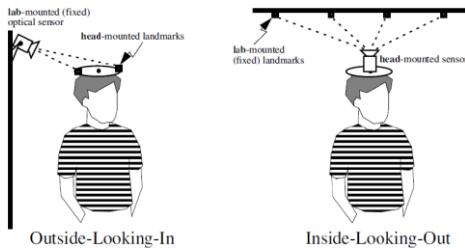

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

HCI LAB

## Inertial Sensing

- The principle of inertial sensing is based on the attempt to conserve either
  - A given axis of rotation
    - Mechanical gyroscopes
  - A position
    - Accelerometers

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/e53/481289bf3383bd4e915b4ef3721d521f.pdf>)

HCI LAB

## Intersense

- InertiaCube 3
  - Orientation, inertial sensors
  - 2000 €, wireless 3000 €
- InterTrax2
  - Discontinued
- IS-900
  - 6 DOF, inertial sensors + ultrasound
  - Very accurate and fast
  - 9 - 43,000 €
- IS-1200
  - For mobile augmented reality
  - InertiaCam looks for fiducials
  - Supports over 30,000 fiducials



[http://www.fkm.utm.my/~kisin/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kisin/eng_design/vr/VR_Tracking.pdf)

HCI LAB

## InertiaCube4

- Sourceless 3DOF tracking with full 360° range
- Accuracy of 1° yaw, 0.25° pitch & roll
- 200 Hz update rate
- 2000° maximum angular rate
- Adjustable output filters and rotational sensitivity
- Prize: \$995




<http://www.intersense.com/pages/18/214>

HCI LAB

## Mechanical Gyroscope

- Mechanical gyroscopes are based on the principle of conservation of angular momentum
  - The wheel is mounted on a frame so that the external moments are minimized
  - This allows the target to turn around the wheel without experiencing a change in the direction of its axis




Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/e53/481289bf3383bd4e915b4ef3721d521f.pdf>)

HCI LAB

## Accelerometer


- An accelerometer measures the linear acceleration of an object to which it is attached
- A single-degree-of-freedom device which has
  - Some kind of mass
  - A spring like supporting system
  - A frame structure with damping properties
- It may rely for example on a mass mounted on a piezo-electric crystal and attached to the target



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/e53/481289bf3383bd4e915b4ef3721d521f.pdf>)

## Mechanical Linkages

- Two types have been used
- One is an assembly of mechanical parts that can each rotate providing the user with multiple rotation capabilities
  - The orientation of the linkages is computed from the various linkages angles measured with incremental encoders or potentiometers
  - This type of tracking system uses mechanical linkages between the reference and the target



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc15fb4ef3721d521f.pdf>)

## Mechanical Linkages .


- Other types of mechanical linkages are wires that are rolled on coils
  - A spring system ensures that the wires are tensed in order to measure the distance accurately
- The degrees of freedom sensed by mechanical linkage trackers are dependent upon the constitution of the tracker mechanical structure



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc4eb15fb4ef3721d521f.pdf>)

## Phase Difference

- Measures the relative phase of an incoming signal from a target and a comparison signal of the same frequency located on the reference
  - As in the TOF approach, the system is equipped with three emitters on the target and three receivers on the reference



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc15fb4ef3721d521f.pdf>)

## Direct-Field

- Two different types:
  - Magnetic field
    - i.e. Magnetometers
  - Gravitational field
    - i.e. inclinometer

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc4eb15fb4ef3721d521f.pdf>)


## Magnetometers

- Magnetometers measure the orientation of an object with respect to the magnetic field of the earth
  - Magnetic field sensors include fluxgate, Hall effect, magneto-resistive, and magneto-inductive sensors
  - The most relevant magnetometers use magneto-inductive sensors

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc15fb4ef3721d521f.pdf>)

## Inclinometers

- An inclinometer operates on the principle of a pendulum
- Common implementations use electrolytic or capacitive sensing of fluids
  - A simple implementation may measure the relative level of fluids in two branches of a tube to compute inclination
  - More advanced implementations include an optical inclinometer



Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/c53/48178954f3383bdc4eb15fb4ef3721d521f.pdf>)

## Hybrid Approaches

- Hybrid technology refers to the combination of various technologies and systems based on different principles of operation
  - i.e. TOF measurements versus phase difference measurements
- Pros:
  - Both relative and absolute measurements
  - Make exhaustive measurements
- Cons:
  - Complex
  - Cost

Rolland, J.P., Baillot, Y., Goon, A.A. A survey of tracking technology for virtual environments, Fundamentals of wearable computers and augmented reality, 2001. (<https://pdfs.semanticscholar.org/e531/58178954f3383e6d15fbaedf7721d521f.pdf>)

## Video Tracking

### Vision based tracking

- Video is processed (computer vision)
  - Very heavy calculation
  - Markers, chroma-key helps a lot
  - OpenCV, <https://opencv.org/>
- Image filtering, contour finding
- Feature extraction, object recognition
- Recognition of forms

[http://www.fkm.utm.my/~kisin/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kisin/eng_design/vr/VR_Tracking.pdf)

### Feature-based Object Detection

- In feature-based object detection, standardization of image features and registration (alignment) of reference points are important
- Shape-based approaches
  - Hard due to:
    - The difficulty of segmenting objects of interest in the images
    - Many objects with occlusions and shading
  - Images may need to be filtered depending on the application
    - Different object types such as persons, flowers, and airplanes may require different algorithms
    - For more complex scenes, noise removal and transformations invariant to scale and rotation may be needed

<http://medianet.kent.edu/surveys/ADODF-objectdetection/index.html>

### Feature-based Object Detection .

- Color-based approaches
  - Not always useful but easy to be acquired
  - Low cost

<http://medianet.kent.edu/surveys/ADODF-objectdetection/index.html>

### Template-based object detection

- Object detection matches features between the template and the image sequence under analysis
  - If a template describing a specific object is available
  - Object detection with an exact match is computationally expensive
  - Quality of matching depends on the **details** and the **degree of precision** provided by the object template
- Two types exist:
  - Fixed template matching
  - Deformable template matching

<http://medianet.kent.edu/surveys/ADODF-objectdetection/index.html>

---

HCI LAB

---

## Fixed template matching

- Useful when object shapes do not change with respect to the viewing angle of the camera
- Two major techniques
  - Image subtraction
    - The template position is determined from minimizing the distance function between the template and various positions in the image
  - Correlation
    - Matching by correlation utilizes the position of the normalized cross-correlation peak between a template and an image to locate the best match

<http://medianet.kent.edu/surveys/IAD01F-objectdetection/index.html>

---

HCI LAB

---

## Deformable Template Matching

- Deformable template matching approaches are more suitable for cases where objects vary due to rigid and non-rigid deformations
  - These variations can be caused by either the deformation of the object per se or just by different object pose relative to the camera
  - Because of the deformable nature of objects in most video, deformable models are more appealing in tracking tasks

<http://medianet.kent.edu/surveys/IAD01F-objectdetection/index.html>

---

HCI LAB

---

## Motion Detection

- Motion detection complicates the object detection problem by adding object's temporal change requirements,
  - However it also provides another information source for detection and tracking
- A large variety of motion detection algorithms have been proposed

<http://medianet.kent.edu/surveys/IAD01F-objectdetection/index.html>

---

HCI LAB

---

## Object Tracking using Motion

- Motion detection provides useful information for object tracking
  - Tracking requires extra segmentation of the corresponding motion parameters
- Two categories:
  - Motion-based
  - Model-based

<http://medianet.kent.edu/surveys/IAD01F-objectdetection/index.html>

---

HCI LAB

---

## Object Tracking using Motion .

- Motion-based
  - Rely on robust methods for grouping visual motion consistencies over time
  - Fast but have considerable difficulties in dealing with non-rigid movements and objects
- Model-based
  - Explore the usage of high-level semantics and knowledge of the objects
  - More reliable compared to the motion-based
  - Suffer from high computational costs for complex models
    - Due to the need for coping with scaling, translation, rotation, and deformation of the objects

<http://medianet.kent.edu/surveys/IAD01F-objectdetection/index.html>

---

HCI LAB

---

## Face Recognition

- Easy way is to compare a selection of facial features from the image and a face database
- Typically used in security systems and can be compared to other biometrics such as fingerprint or eye iris recognition systems
  - Recently, popular as a commercial identification and marketing tool
- Face Recognition
  - <http://www.face-rec.org/>

---

HCI LAB


---

## Camera Tracking

- A single camera can do 2D tracking

- Typically used in second person VR

- Participants watch themselves in the virtual world
- The video source is used both for tracking the user and adding the user's image into the virtual world



[http://www.fkm.utm.my/~kesim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kesim/eng_design/vr/VR_Tracking.pdf)

---

HCI LAB

---

## Camera Tracking .

- Usually multiple cameras needed for 3D tracking

- Several dots are needed to acquire the orientation

- The positions of the light dots in the image give the directions of the objects as seen from the camera

- The operation range can be very large

- Requires calculation, can be expensive and slow

- Time-of-flight cameras send IR

[http://www.fkm.utm.my/~kesim/eng\\_design/vr/V0\\_Tracking.pdf](http://www.fkm.utm.my/~kesim/eng_design/vr/V0_Tracking.pdf)

---

HCI LAB

---

## Videometric Tracking

- Inside-looking-out
- Video camera on the tracked object
- The camera watches surroundings
- VR system analyzes images
  - Try to locate landmarks
  - Derive camera's relative position to the landmarks
- Often used in augmented reality systems
  - Can operate in a large area, also outdoors
    - i.e. a camera on the HMD enables to determine the corners of the room
- Computational resources needed to do the image analysis becomes a consideration
- A single camera can determine its own 6-DOF position
  - Multiple reference points needed

[http://www.fkm.utm.my/~kesim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kesim/eng_design/vr/VR_Tracking.pdf)

---

HCI LAB

---

## Videometric Tracking .

- The location of the landmarks must be known or be discernible from other data

- Otherwise calculations get very complex and probability for errors grow

- Landmark color and shape different from surroundings
  - Reference points

- Using LED lights at certain spots

- Using special easily distinguishable patterns

[http://www.fkm.utm.my/~kesim/eng\\_design/vr/V0\\_Tracking.pdf](http://www.fkm.utm.my/~kesim/eng_design/vr/V0_Tracking.pdf)


---

HCI LAB

---

## Videometric Tracking ..

- Usage of LED lights
- Infrared sensitive cameras
- Activating the lights as patterns



[http://www.fkm.utm.my/~kesim/eng\\_design/vr/VR\\_Tracking.pdf](http://www.fkm.utm.my/~kesim/eng_design/vr/VR_Tracking.pdf)

## Tracker Types

---

HCI LAB

---

## Mechanical Trackers

- Mechanical tracking devices are widely used nowadays
- The lack of certain hardware devices (i.e. transmitter/receiver) makes mechanical trackers much less sensitive to their immediate environment than other types of trackers
  - i.e. Electromagnetic trackers
- Two different types of mechanical devices are currently used in the industry/research including
  - The arm
  - Force sensing ball

---

HCI LAB

---

## Mechanical Trackers .

- Idea: mechanical arms with joint sensors
  - Advantages: high accuracy, haptic feedback
  - Disadvantages: cumbersome, expensive

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

---

HCI LAB

---

## Mechanical Trackers ..

- The 'arm' or 'boom' sensing device takes measurements in rotation using either a potentiometer or optical encoders
- The device measures the forces exerted and it is therefore applied in force-sensing joysticks



---

HCI LAB

---

## Mechanical Trackers - BOOM

- A BOOM display is an HMD (head mounted display) mounted on the end of a mechanical arm
  - The system detects the position and orientation by this arm
  - Advantage is very high update rate
  - Disadvantage is limited range of user's motion



BOOM HF


---

HCI LAB

---

## Mechanical Trackers - BOOM Tabletop

- A tabletop model



---

HCI LAB

---

## Mechanical Trackers - Motion Capture Suit



---

HCI LAB

---

## Electromagnetic Trackers (EM)

- Electromagnetic trackers are comprised of two simple electronic systems:
  - A transmitter
  - A receiver
- Usually, their main function is to detect the generated variations of the received signal
- In other words, the position and orientation of the transmitters can be calculated



Polhemus FASTRACK electromagnetic tracker

---

HCI LAB

---

## EM Characteristics

- Data returned: 6 DOF
- Spatial distortion – 0.6 mm, 0.025°
- Resolution – 0.00508 mm, 0.025° / inch from receiver
- Jitter (precision) – mm to cm
- Drift - none
- Lag – reported 4 ms
- Update Rate - 120 Hz
- Range - 5 ft
- Number of Tracked Points – 16 (divides update rate)
- Wireless - yes
- Interference and noise – metal, earth
- Mass, Inertia and Encumbrance - minimal
- Durability - high
- Price - \$4000+

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## EM Advantages

- Measure position and orientation in 3D space
- Does not require direct line of sight
- Low encumbrance
- Cost
- Good performance close to emitter
- Lag
- Can be built ‘into’ devices
- Earth magnetic field good for 3DOF

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## EM Disadvantages

- Accuracy affected by
  - DC: Ferrous metal and electromagnetic fields.
  - AC: Metal and electromagnetic fields
- Operate on only one side of the source
  - i.e. the working hemisphere
- Low range (effectively 5' – does not scale well)
- Calibration

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## EM Applications

- Ascension Flock of Birds
- Polhemus Fastrak
- Extremely popular
- Good for many applications
  - CAVEs (remove metal)
  - HMDs
  - Projection displays
  - Fish tank




<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Tracking Error



Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

---

HCI LAB

---

## Optical Trackers

- Optical trackers have the ability to operate over large areas in indoor or outdoor environments
- However, the implementations of optical tracking systems are diverse using
  - Infra-red LEDs, photodiodes, lasers, video cameras, web-cameras
  - Combinations of these

---

HCI LAB

---

## Optical Trackers .

- The creation and maintenance of a corresponding virtual line of sight is essential for the operation of any optical tracking system
- They function by placing the light sources or fiducials on the object to be tracked and then determine the position of the object using light detectors



---

HCI LAB

---

## Cheap Optical Trackers



---

HCI LAB

---

## Optical Tracker

- Idea
  - Image Processing and Computer Vision
- Specialized
  - Infrared, Retro-Reflective, Stereoscopic
- Monocular Based Vision Tracking

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

---

HCI LAB

---

## Optical Tracking Technologies

- Scalable active trackers
  - InterSense IS-900, 3rd Tech HiBall
- Passive optical computer vision
  - Line of sight, may require landmarks
  - Can be brittle
- Computer vision is computationally-intensive




---

HCI LAB

---

## HiBall Tracking System (3<sup>rd</sup> Tech)

- Inside-Out Tracker
  - \$50K USD
- Scalable over large area
  - Fast update (2000Hz)
  - Latency Less than 1 ms
- Accurate
  - Position 0.4mm RMS
  - Orientation 0.02° RMS

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.


---

HCI LAB

---

## Motion Tracking

- Very popular for VR
- Need markers
- Can track whole body
- Expensive solution
- A feasible tool for creating animation
- Visit HCI Lab!!



---

HCI LAB

---

## Motion Tracking .

- Can be based on any tracking method
  - Often cameras are used
  - Reflectors or LEDs used
  - Facial 1-2 cameras
  - Full body 4-6 cameras
- Often not real time (Movies)
- The movements are recorded and animation then rendered



---

HCI LAB

---

## WorldViz PPT

- Freedom of movement in VR
  - Track multiple users over large areas while maintaining precision and accuracy
  - Quickly configure and calibrate with user-friendly, streamlined user interface
  - Real-time sub-millimeter accuracy
  - Integrate with various other real-time rendering software



<https://www.worldviz.com/virtual-reality-motion-tracking/>

---

HCI LAB

---

## OptiTrack

- High-speed, low latency
- Head, controller & body tracking
- Track any object type using a single infrared LED marker configuration
  - Allows for identically manufactured HMDs, weapons, controllers, etc to be tracked simultaneously



<http://optitrack.com/motion-capture-virtual-reality/>

---

HCI LAB

---

## VRECKO

- Modular framework for experiments in VR



<http://vrecko.cz/>


77

---

HCI LAB

---

## VRECKO Video



<http://vrecko.cz/research/vekva/freehand-painting/>

78

---

HCI LAB

---

## Valve's Lighthouse Tracking

- The main idea behind tracking is flooding a room with non-visible light, Lighthouse functions as a reference point for any positional tracking device (like a VR headset or a game controller) to figure out where it is in real 3D space



<http://gizmodo.com>this-is-how-valve-s-amazing-lighthouse-tracking-technol-1705356768>

---

HCI LAB

---

## Valve's Lighthouse Tracking .

- Valve's Lighthouse boxes don't have any cameras
- They just fire light out (sixty times every second) into the world to help ships (or VR headsets) navigate on their own
- That light comes from a whole bunch of stationary LEDs, plus a pair of active laser emitters that spin like crazy



<http://gizmodo.com>this-is-how-valve-s-amazing-lighthouse-tracking-technol-1705356768>

---

HCI LAB

---

## Valve's Lighthouse Tracking ..

- The receiver (VR headset or controller) is covered with little photosensors that detect the flashes and the laser beams
- When a flash occurs, the headset simply starts counting (like a stopwatch) until it "sees" which one of its photosensors gets hit by a laser beam
- It uses the relationship between where that photosensor exists on the headset, and when the beam hit the photosensor, to mathematically calculate its exact position relative to the base stations in the room

<http://gizmodo.com>this-is-how-valve-s-amazing-lighthouse-tracking-technol-1705356768>

---

HCI LAB

---

## Acoustic Trackers

- Acoustic tracking systems make use of ultrasonic signals to avoid interference with the detectable spectrum of human users
  - Based on TOF measurement
    - Measures the time needed for the sound to reach the receivers and then the distance is calculated based on the speed of sound in the air, producing absolute position and orientation values

---

HCI LAB

---

## Acoustic Trackers .

- Since TOF can only measure distance, to achieve 3D tracking a combination of transmitter and receiver is required
  - For 3 DOF one transmitter and one receiver is required
- For 6 DOF tracking 3 transmitters and 3 receivers are necessary



Acoustic Magic

---

HCI LAB

---

## Acoustic Trackers Pros and Cons

- Pros: Small, Cheap
- Cons: 3DOF, Line of Sight, Low resolution, Affected Environment Condition (pressure, temperature)




Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup>, 2013.

HCI LAB

## Ultrasound Head Tracker

- Transmitter, receiver and electronics unit
- Transmitter is a set of three ultrasonic speakers 30cm from each other
  - Rigid and fixed triangular frame
- Receiver is a set of three microphones
  - Placed at the top of the HMD
  - May be part of 3D mice, stereo glasses, or other interface devices
- Range typically about 1.5 m


[http://www.fkm.utm.my/~ksim/eng\\_design/vr/VB\\_Tracking.pdf](http://www.fkm.utm.my/~ksim/eng_design/vr/VB_Tracking.pdf)



HCI LAB

## Ultrasound Extended Range

- Certain applications require larger user motion volume than a transmitter can cover
- Several transmitters multiplexed with one receiver
- Only one transmitter works at a time
- The computer switches the transmitters



[http://www.fkm.utm.my/~ksim/eng\\_design/vr/VB\\_Tracking.pdf](http://www.fkm.utm.my/~ksim/eng_design/vr/VB_Tracking.pdf)

HCI LAB

## Other Trackers

HCI LAB

### Gloves

- Allow natural interaction with virtual world
  - Grab
  - Gestures
- Two types
  - Force feedback
  - Pinch gloves



HCI LAB

## Angle Measurement

- Measurement of the bend of various joints in the user's body
- Used for:
  - Reconstruction of the position of various body parts (hand, torso).
  - Measurement of the motion of the human body (medical)
  - Gestural Interfaces
    - Sign language



<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

HCI LAB

## Angle Measurement Technology

- Optical Sensors
  - Emitter and receiver on ends of sensor
  - As sensor is bent, the amount of light from emitter to receiver is attenuated
  - Attenuation is determined by bend angle
  - Examples: Flexible hollow tubes, optical fibers
  - VPL Data Glove



<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Angle Measurement Technology .

- Strain Sensors
  - Measure the mechanical strain as the sensor is bent
  - May be mechanical or electrical in nature.
  - P5 Glove \$25 (!)
  - Cyberglove (Virtual Technologies)




<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Joints and Cyberglove Sensors

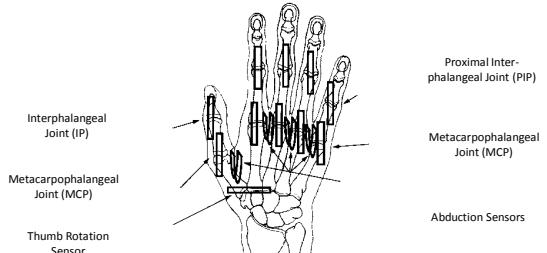

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Angle Measurement Technology ..

- Exoskeletal Structures
  - Sensors mimic joint structure
  - Potentiometers or optical encoders in joints report bend
  - Exos Dexterous Hand Master

<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Exoskeleton & Angle Sensors

- Analogous
- Tethered
- No identification problem
- Real-time
- No range limit
- Rigid body approximation



---

HCI LAB

---

## Pinch Gloves

- Have sensor contacts on the ends of each finger
- Good as interfaces
- Good at grabbing
- No feedback



<http://www.cise.ufl.edu/~lok/teaching/ve-s09/tracking.ppt>

---

HCI LAB

---

## Monkey

- High accuracy
- High data rate
- Not realistic motion
- No paid actor



---

HCI LAB

---

## Videos

- Dexmo exoskeleton glove lets you feel objects in virtual reality
  - [https://www.youtube.com/watch?v=nin1\\_0EHU5g](https://www.youtube.com/watch?v=nin1_0EHU5g)
- Stelarc: EXOSKELETON
  - <https://www.youtube.com/watch?v=vj0JUfmxkv4>
- Paralysed walk again thanks to revolutionary robotic exoskeleton that responds to brain waves
  - <https://www.youtube.com/watch?v=KZuXDSZ6JSA>

---

HCI LAB

---

## Outdoor Tracking

---

HCI LAB

---

### GPS Trackers

- GPS is a technology widely used for outdoor tracking
- The most important categories include
  - Standard GPS
  - Differential GPS
  - Real-time kinematic GPS



---

HCI LAB

---

### GPS Trackers .

- Standard GPS is a satellite based positioning system that utilizes a total of 29 satellites
  - This will change with Galileo!
- The position of the user is determined by processing radio signals from the satellites
- In theory, GPS systems can estimate the user's position, by calculating the arrival time of at least three satellite signals


---

HCI LAB

---

### GPS Trackers .

- Satellites send position + time
- GPS Receiver positioning
  - 4 satellites need to be visible
  - Differential time of arrival
  - Triangulation
- Accuracy
  - 5-30m+, blocked by weather, buildings etc




---

HCI LAB

---

### GPS Trackers ..

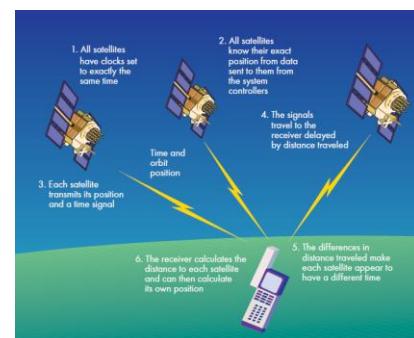Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.


## Problems with GPS

- Takes time to get satellite fix
  - Satellites moving around
- Earth's atmosphere affects signal
  - Assumes consistent speed (the speed of light)
  - Delay depends where you are on Earth
  - Weather effects
- Signal reflection
  - Multi-path reflection off buildings
  - Signal blocking
  - Trees, buildings, mountains
- Satellites send out bad data
  - Misreport their own position

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

## Differential GPS


- Uses emitting ground stations that refine the resolution
- Accurate to < 5cm close to base station
  - 22m/100 km
- Expensive
  - \$20-40,000 USD

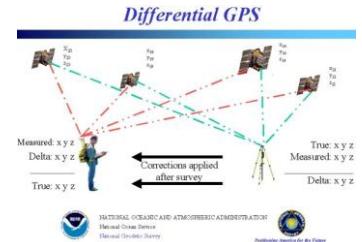

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

## Differential GPS .

- The mobile GPS receiver monitors signals from a fixed radio transmitter and another GPS receiver
- To refine the resolution the transmitter sends the corrected co-ordinates
  - Based on the difference between the known and the computed positions




Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

## Assisted-GPS (A-GPS)

- Use external location server to send GPS signal
  - GPS receivers on cell towers, etc
  - Sends precise satellite position (Ephemeris)
- Speeds up GPS Tracking
  - Makes it faster to search for satellites
  - Provides navigation data (don't decode on phone)
- Other benefits
  - Provides support for indoor positioning
  - Can use cheaper GPS hardware
  - Uses less battery power on device

Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

## Assisted-GPS (A-GPS)


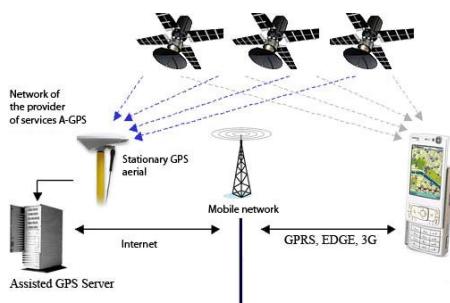


<http://gps-response.com/61-a-gps.html>

## Cell Tower Triangulation

- Calculate phone position from signal strength

- < 50 m in cities
- > 1 km in rural



Billinghurst, M. COSC 426: Augmented Reality, July 26<sup>th</sup> 2013.

## WiFi Positioning

- Estimate location based on WiFi access points
  - Use known locations of WiFi access points
- Triangulate through signal strength
  - i.e. PlaceEngine
- Accuracy
  - 5 to 100m
    - Depending on WiFi density



## Eye Tracking

## Eye Tracking

- Eye trackers measure rotations of the eye in one of several ways, but principally they fall into three categories:
  - VOG: Measurement of the movement of an object (i.e. special contact lens) attached to the eye
  - Optical tracking without direct contact to the eye
  - EOG: Measurement of electric potentials using electrodes placed around the eyes

[https://en.wikipedia.org/wiki/Eye\\_tracking](https://en.wikipedia.org/wiki/Eye_tracking)

## Video Oculography (VOG)

- VOG is a non-invasive, video-based method of measuring horizontal, vertical and torsional position components of the movements of both eyes
  - Using a head-mounted mask that is equipped with small cameras
  - Usually employed for medical purposes



VOG examination in progress

<https://en.wikipedia.org/wiki/Video-oculography>

## Optical Tracking

- Light is reflected from the eye and sensed
  - Video camera or some other specially designed optical sensor
- The information is then analyzed to extract eye rotation from changes in reflections
- To track over time video-based eye trackers typically use
  - The corneal reflection
    - First Purkinje image
  - The center of the pupil as features





Diagram of light and four Purkinje images

[https://en.wikipedia.org/wiki/Eye\\_tracking](https://en.wikipedia.org/wiki/Eye_tracking)

## VOG Operating Principles

- Iris tracking and high-quality video imaging
- Senses 3D linear acceleration and 3D rotational velocity
- Horizontal, vertical and torsional eye movements




[www.emvision.com/iris-and-eye-tracking-systems/products/3d-vog.html](http://www.emvision.com/iris-and-eye-tracking-systems/products/3d-vog.html)

Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

**HCI LAB**

## VOG Performance

- Resolution
  - Horizontal : 0.05°
  - Vertical: 0.05°
  - Torsional: 0.1°
- Head motion recording
  - 3D rotational velocity [°/s]
  - 3D linear acceleration [m/s<sup>2</sup>]



Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

**HCI LAB**


## Tradeoffs

- Highly accurate torsional measurement
- Permits comparison of slow phase velocity (SPV) and head rotation velocity
- Useful for research and diagnosis
- Not practical for standard point-of-regard research

Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

**HCI LAB**

## Pupil - Corneal Reflection




Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

**HCI LAB**

## Pupil-Corneal Reflection Operating Principles

### Bright versus Dark Pupil

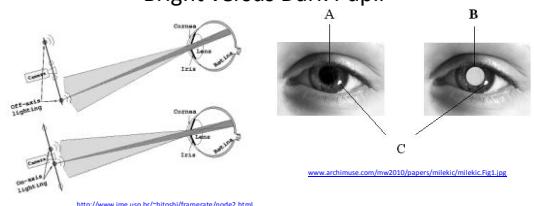

Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

**HCI LAB**


## Pupil - Corneal Reflection Tradeoffs

- Ambient lighting
- Eye color
- Eyelashes
- Makeup

Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.


**HCI LAB**

## Electro-oculography (EOG)

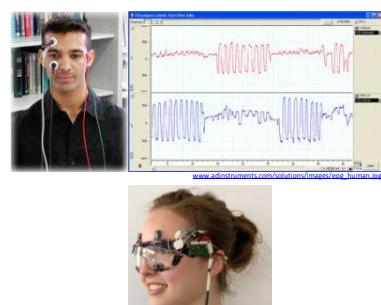

## EOG Operating Principles


- Permanent potential difference between the cornea and the fundus of 0.4 -1.0 mV
  - Small voltages can be recorded from the region around the eyes which vary as the eye position varies



Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

## EOG Performance

- Accuracy :  $\pm 2^\circ$
- Maximum rotation:  $\pm 70^\circ$
- Linearity decreases progressively for angles  $> 30^\circ$
- Signal magnitude range: 5 – 20  $\mu\text{V}^\circ$



Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

## EOG Tradeoffs

- Inexpensive
- Simple operation
- Need for frequent calibration and recalibration
  - Corneoretinal potential can vary diurnally
  - Affected by light and fatigue
  - Drifting- electrode slipping, change in skin resistance
  - Noise from other electrical devices, face muscles
  - Blinking

Marchak, F.M., Eye Movement Recording, Veridical Research and Design Corporation, Society for Psychophysiological Research, 14 Sep 2011.

## SMI Eye Tracking HMD for HTC Vive

- SMI's eye tracking HMD based on HTC Vive
  - Tracking : 250 Hz binocular
  - Trackable field of view: Full field of view 110°
  - Accuracy: 0.2°
- Data
  - Inter-pupillary distance (IPD, pupil to pupil distance)
  - Point of regard on display (left and right eye, binocular)
  - Gaze base point
  - Gaze vectors (left and right eye, binocular)

<https://www.smivision.com/eye-tracking/product/eye-tracking-htc-vive/>

## Eye Tracking Videos

- The Eye Tribe Tracker
  - <https://www.youtube.com/watch?v=XE0aANnzrL8>
- GearVR eye tracking demo - using eyes for input
  - <https://www.youtube.com/watch?v=Wz61h6PrSsQ>
- FOVE - Eye tracking use case
  - <https://www.youtube.com/watch?v=cmUYRkc6dPY>
- Tobii Eye Tracker = Higher Gamer Skill Level Increase
  - <https://www.youtube.com/watch?v=Km1lZ84vnI>

## Questions

