



PA152: Efficient Use of DB

13. Replication and High Availability

Vlastislav Dohnal



Credits

- This presentation is based on:
 - Microsoft MSDN library
 - Course *NoSQL databases and Big Data management*
 - Irena Holubová
 - Charles University, Prague
 - <http://www.ksi.mff.cuni.cz/~holubova/NDBI040/>
 - PostgreSQL documentation
 - <http://www.postgresql.org/docs/9.3/static/high-availability.html>

Contents

- Availability
- Data distribution & replication
- High availability
- Failover
- Recommendations

Availability

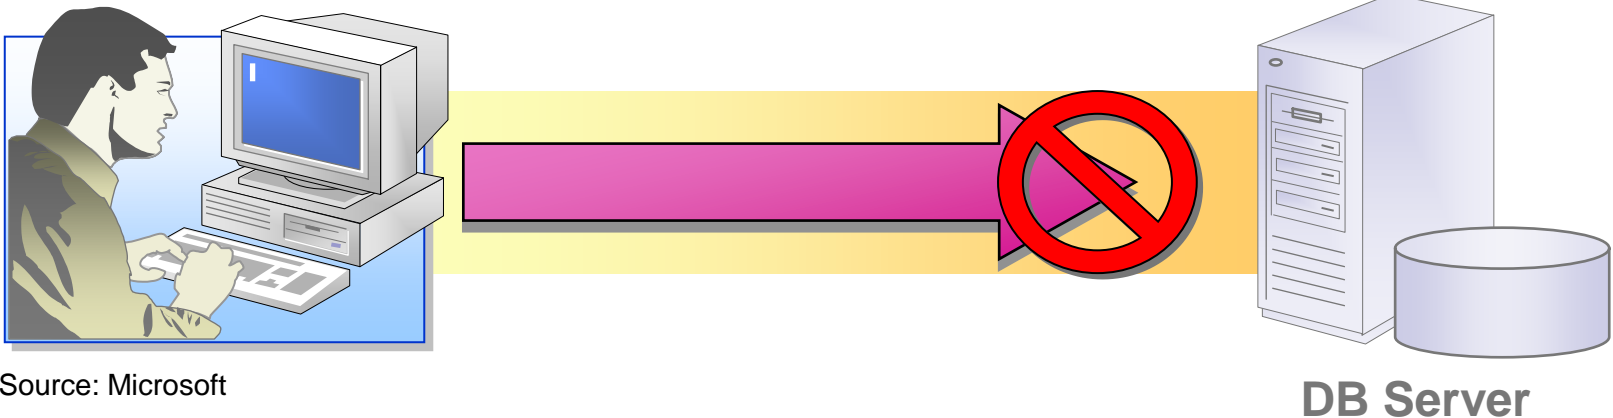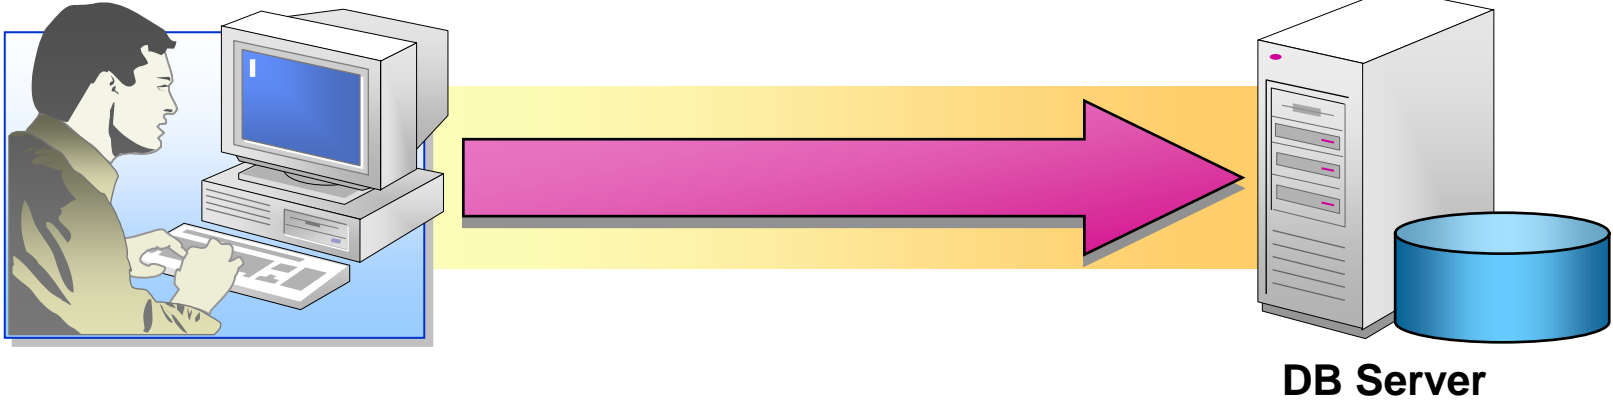

Source: Microsoft

High availability (HA) is the ability of a system to operate continuously without failing for a specified period of time.

Determining Availability

■ Hours of Operation

- Business hours vs. all of the time

 - intranet service vs. web service

 - shift workers vs. all-around the world customers

■ Connectivity Requirements

- Tight/Loose coupling of app and DBMS

 - Synchronous vs. asynchronous data updates

- Online vs. offline applications – so response time can be important!

Availability

■ Definition using operation hours

□ $Av = \text{“up time”} / \text{“total time”}$

■ “up time” = the system is up and operating

□ More practical def.

■ $Av = (\text{total time} - \text{down time}) / \text{total time}$

■ Down time

□ Scheduled – reboot, SW/HW upgrade, ...

□ Unscheduled – HW/SW failure, security breaches, network unavailability, power outage, disasters, ...

□ Non-functional app requirements – response time

■ For “true” high-availability, down time is not distinguished

Nines

- Availability as percentage of uptime

- Class of nines: $c = \lfloor -\log_{10}(1 - Av) \rfloor$

- Assuming 24/7 operation:

Nine class	Availability	Downtime per year	Downtime per month	Downtime per week
1	90%	36.5 days	72 hours	16.8 hours
2	99%	3.65 days	7.20 hours	1.68 hours
3	99.9%	8.76 hours	43.8 minutes	10.1 minutes
4	99.99%	52.56 minutes	4.32 minutes	1.01 minutes
5	99.999%	5.26 minutes	25.9 seconds	6.05 seconds
6	99.9999%	31.5 seconds	2.59 seconds	0.605 seconds
7	99.99999%	3.15 seconds	0.259 seconds	0.0605 seconds

Source: Wikipedia.org

Scalability

- Providing access to a number of concurrent users
- Handling growing amounts of data without losing performance
- With acceptable latency!

Scalability: Solutions

- **Scaling Up – vertical scaling** → vendor dependence
 - Increasing RAM
 - Multiprocessing
- **Scaling Out – horizontal scaling**
 - Server federations / clusters
 - Data partitioning
 - sharding
 - Replication
 - Read-only (standby) servers

Need for Distributing Data

- Brings data closer to its user
- Allows site independence
- Separates
 - Online transaction processing
 - Read-intensive applications
- Can reduce conflicts during user requests
- Process large volumes of data

Horizontal Scaling


- Systems are distributed across multiple machines or nodes
 - Commodity machines → cost effective
 - Often surpasses scalability of vertical approach
- Fallacies of distributed computing by Peter Deutsch
 - Network
 - Is reliable, secure, homogeneous
 - Topology does not change
 - Latency and transport cost is zero
 - Bandwidth is infinite
 - One administrator

Source: <https://blogs.oracle.com/jag/resource/Fallacies.html>

Replication / Distribution Model

- Model of distributing data
 - Replication
 - The same data stored in more nodes.
 - Filtering data (sharding)
 - The data is partitioned and stored separately
 - Helps avoid replication conflicts when multiple sites are allowed to update data.

Filtering Data (in general)

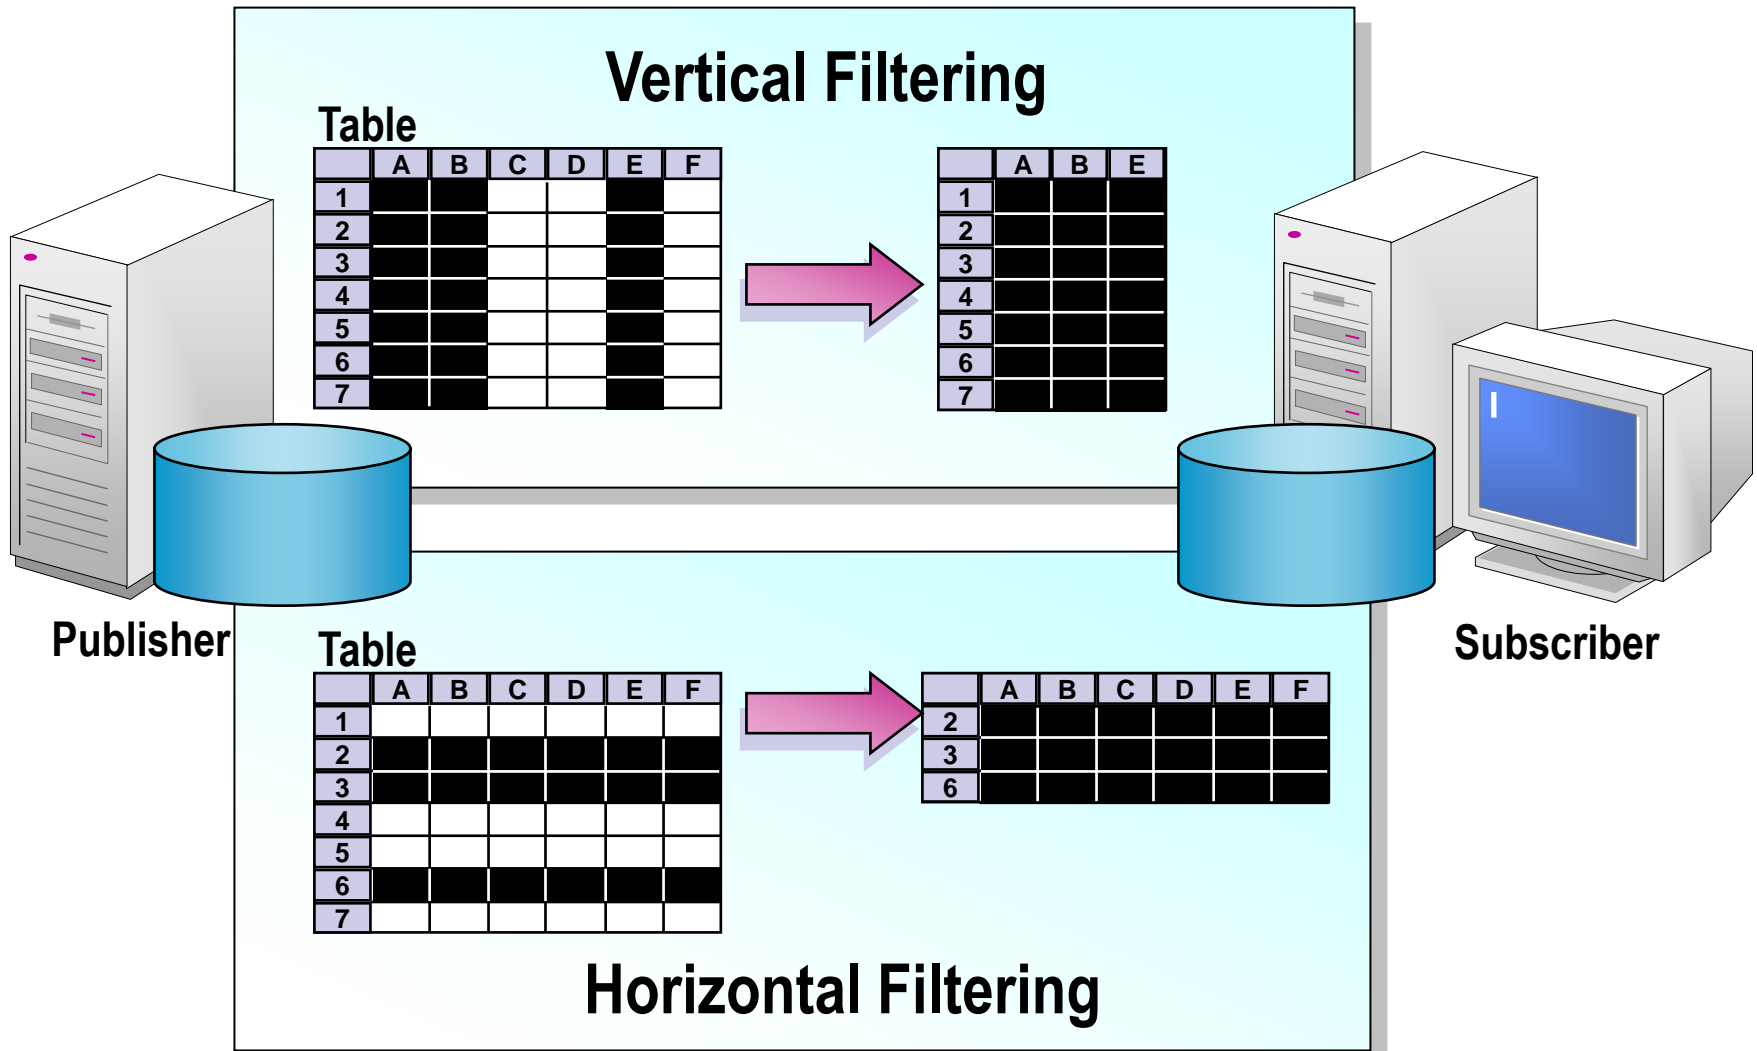

Source: Microsoft

Distribution Model: Replication

- Master-slave model


- Load-balancing of read-intensive queries

- Master node

- manages data
- distributes changes to slaves

- Slave node


- stores data
- queries data
- no modifications to data

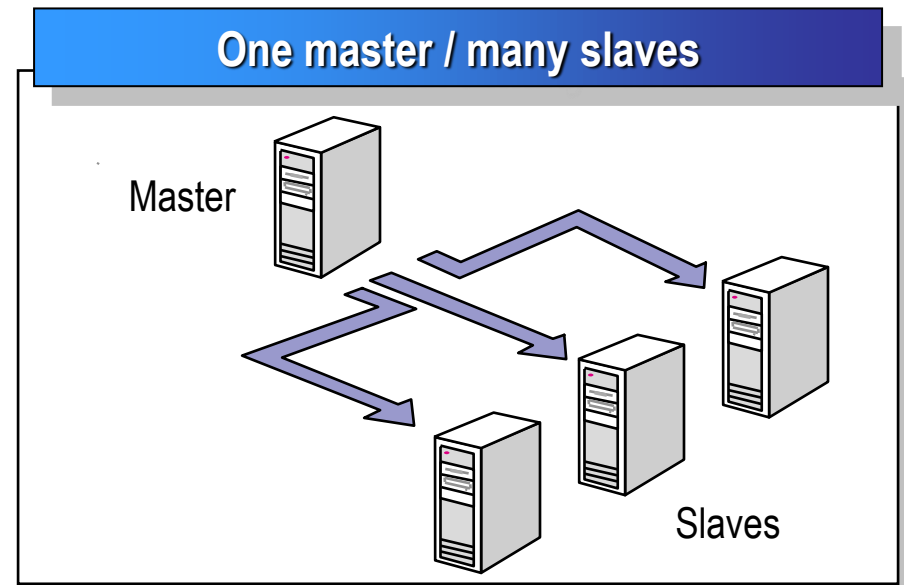

Distribution Model: Replication

■ Master-master model


- Typically, with sharding (filtering) data
 - Master for a subset of data
 - Slave for the rest
- Consistency needs resolving update conflicts

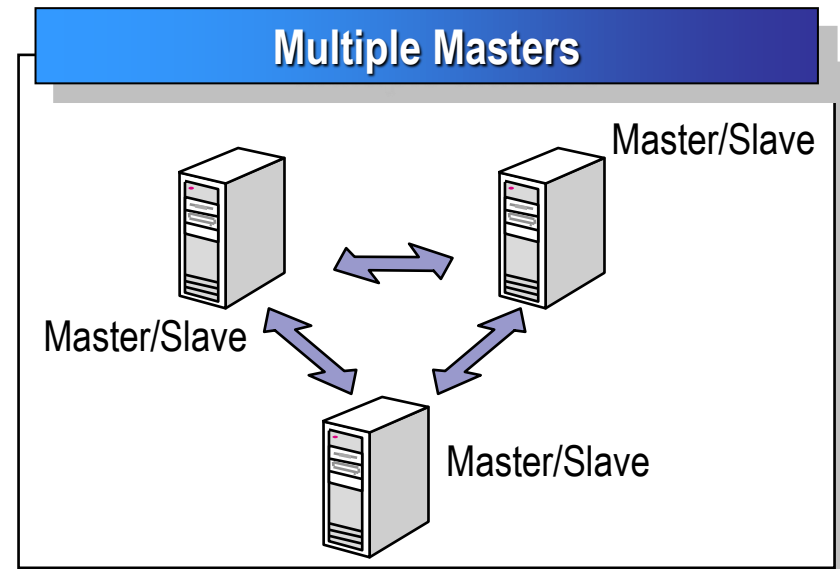


Master-Master Model with Sharding

Orders (Master A)			
Primary Key			
Area	Id	Order_no	Qty
1	1000	~	15
1	3100	~	22
2	1000	~	32
2	2380	~	8
3	1000	~	7
3	1070	~	19

Master/Slave




Master/Slave



Master/Slave


Orders (Master B)			
Primary Key			
Area	Id	Order_no	Qty
1	1000	~	15
1	3100	~	22
2	1000	~	32
2	2380	~	8
3	1000	~	7
3	1070	~	19



Orders (Master C)			
Primary Key			
Area	Id	Order_no	Qty
1	1000	~	15
1	3100	~	22
2	1000	~	32
2	2380	~	8
3	1000	~	7
3	1070	~	19

Source: Microsoft

Replication Types (for “real” multi-master model)

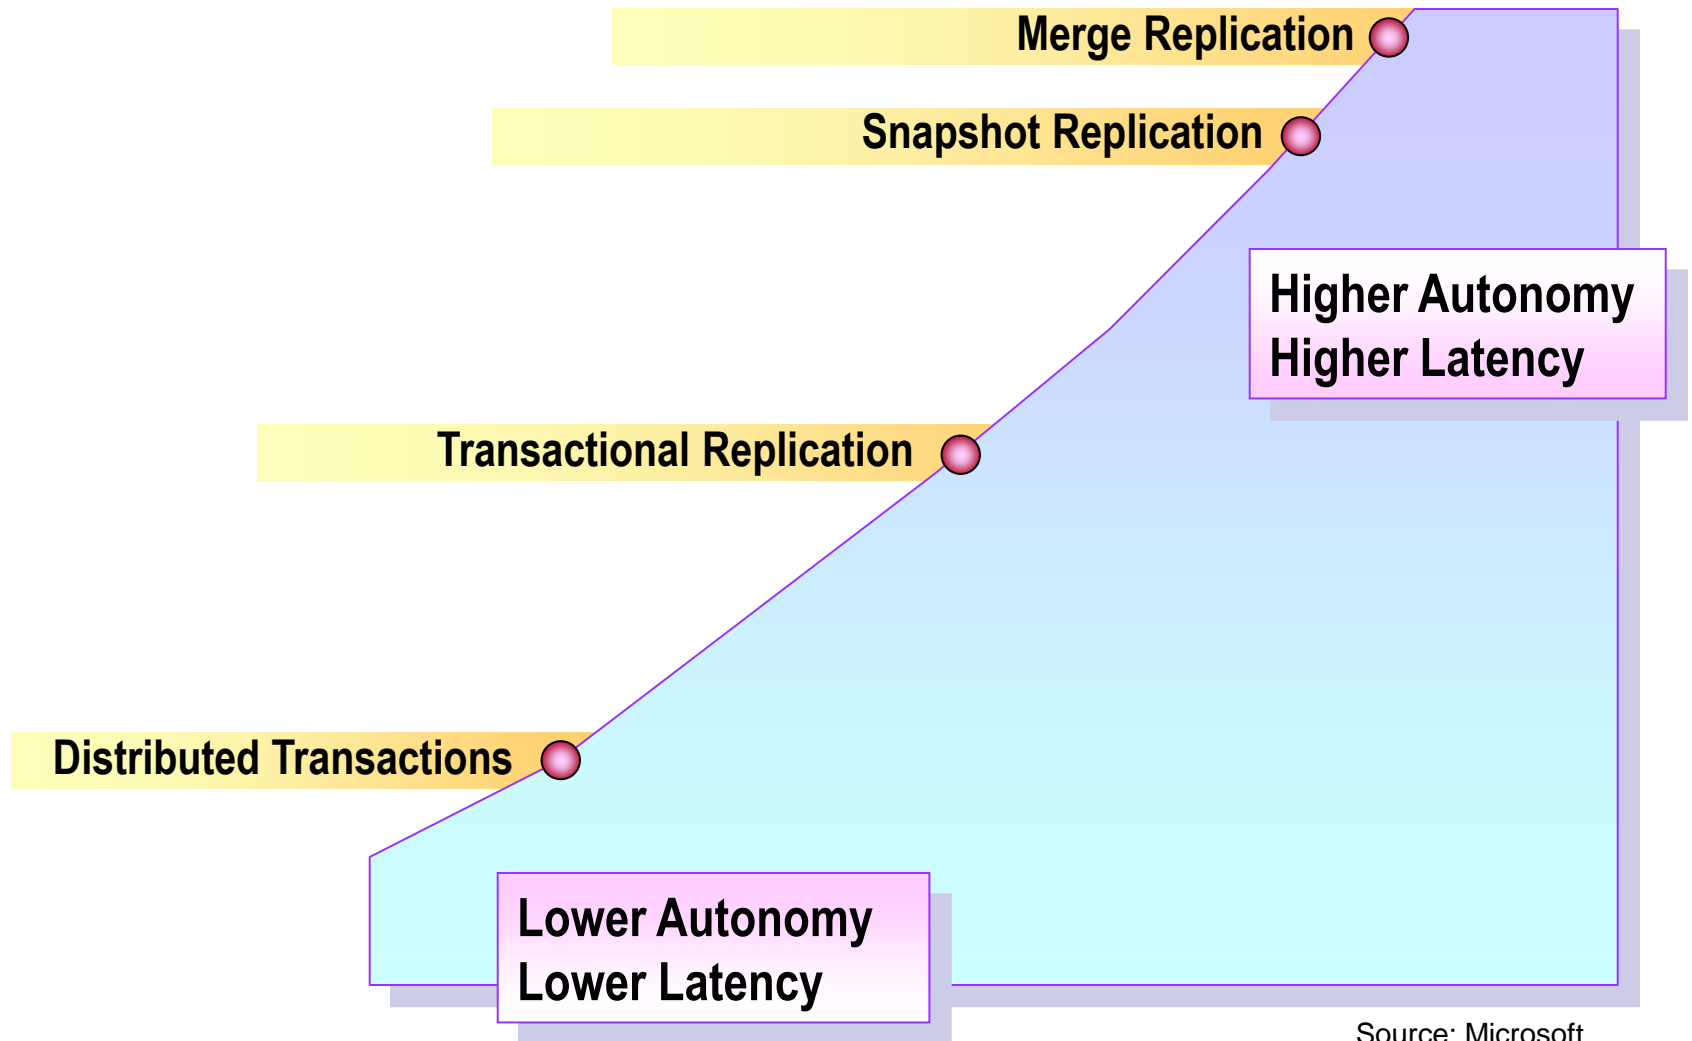

Source: Microsoft


Replication Types

■ Distributed Transactions

- For “real” master-master model, ensures consistency
- Low latency, high consistency

■ Transactional Replication


- Replication of incremental changes
- Minimal latency (typically online)
- Conflicts solves using shared locks

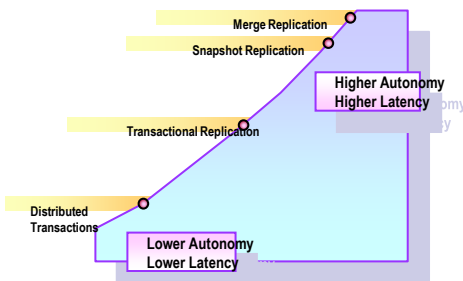

Replication Types

■ Snapshot Replication


- Periodic bulk transfer of new snapshots of data
 - Intermediate updates to data might be unnoticed by “subscribers”
- Data changes – substantial but infrequent
- Slaves are read-only
- High latency is acceptable

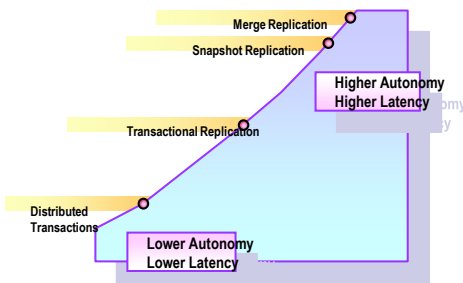

Replication Types

■ Merge Replication

- Autonomous changes to replicated data are later merged
 - Default and custom conflict resolution rules
- Does not guarantee transactional consistency, but converges
- Adv: Nodes can update data offline, sync later
- Disadv: Changes to schema needed.
 - E.g., row version, row originator

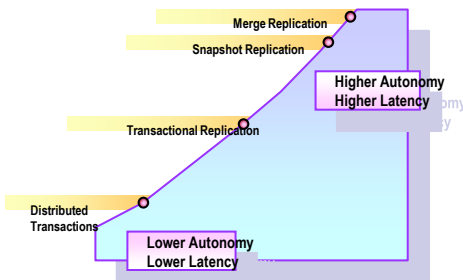

Brewer's CAP Theorem

■ Consistency

- After an update, all readers in a distributed system see the same data
- All nodes are supposed to always contain the same data
- E.g., in multiple instances, all writes must be duplicated before write operation is completed.

■ Availability


- Every request receives a response
 - about whether it was successful or failed

■ Partition Tolerance

- System continues to operate despite arbitrary message loss or failure of part of the system.

Brewer's CAP Theorem

- Only 2 of 3 guarantees can be given in a “shared-data” system.
 - Proved by Nancy Lynch in 2002
- ACID
 - provides Availability and Consistency
 - E.g., replication with distributed transactions
- BASE
 - provides Availability and Partition tolerance
 - Reality: you can trade a little consistency for some availability
 - E.g., sharding with merge replication

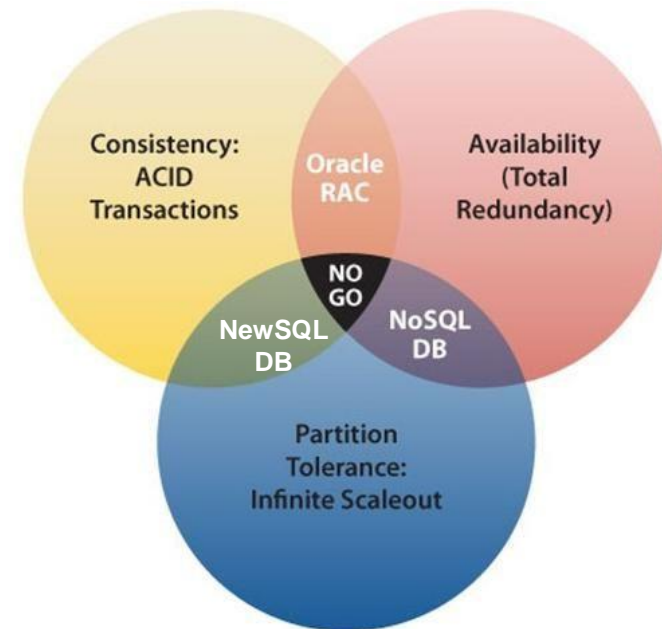

Source: <http://bigdatanerd.wordpress.com>

NewSQL

- Distributed database systems that scale out
- CP systems
 - trade availability for consistency when partition occurs
- MySQL cluster, Google Spanner, VoltDB, ...
 - In fact, master-master replication with data sharding

BASE Properties

■ Basically Available

- Partial failures can occur, but without total system failure

■ Soft state


- System is in flux / non-deterministic
 - Changes occur all the time

■ Eventual consistency (replica convergence)

- is a liveness guarantee
 - reads eventually return the same value
- is not safety guarantee
 - can return any value before it converges


Consistency

- Strong (ACID) vs. Eventual (BASE) consistency
- Example:

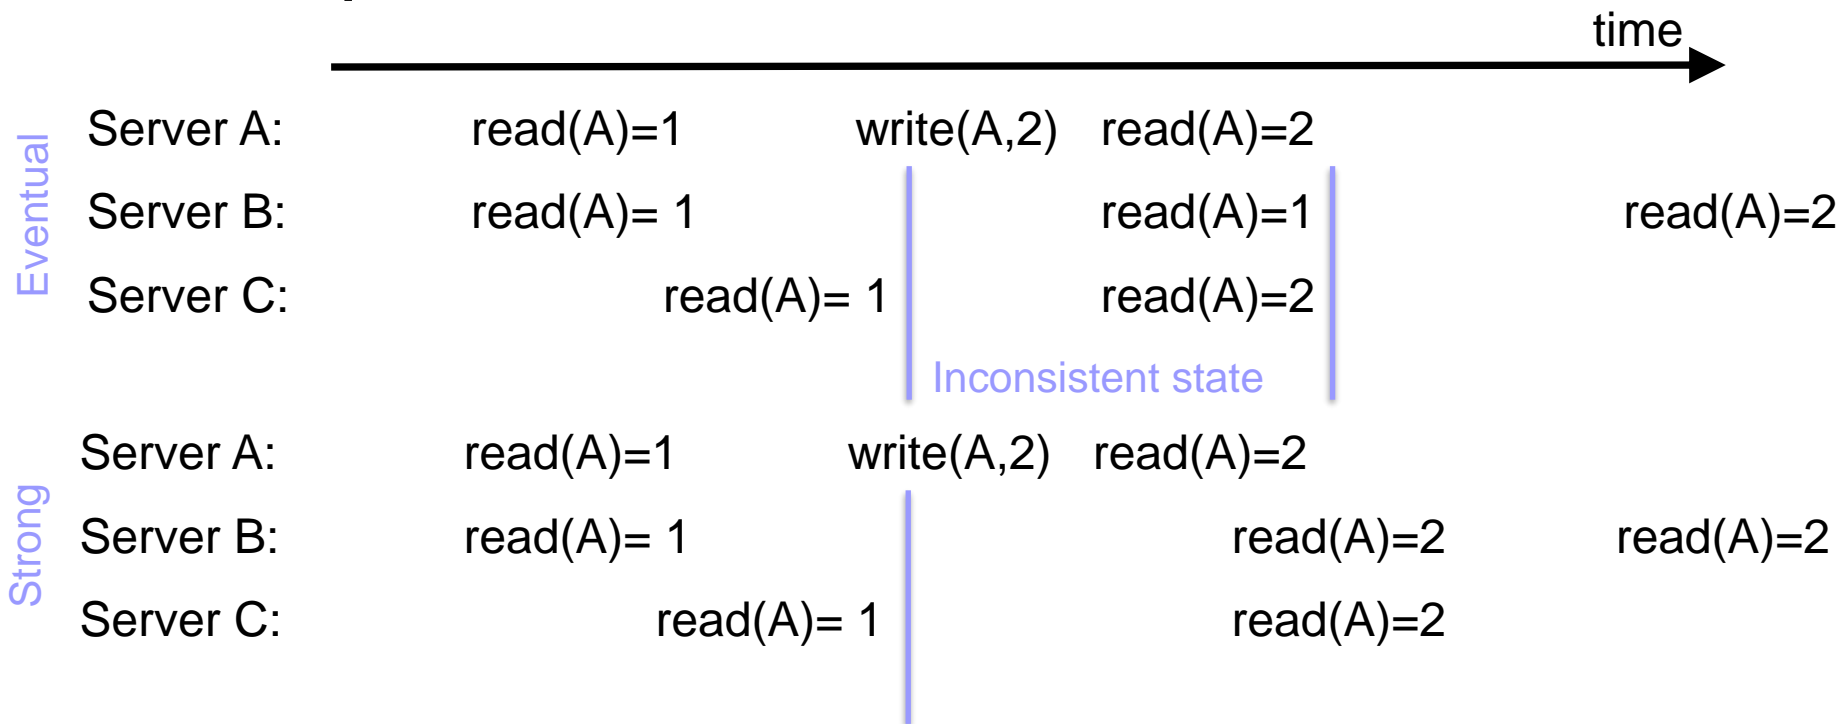

Maintaining High-Availability of DBMS

- Standby server
 - Shared disk failover (NAS)
 - File system replication (DRBD)
 - Transaction log shipping
 - Trigger-based replication
 - Statement-Based Replication Middleware

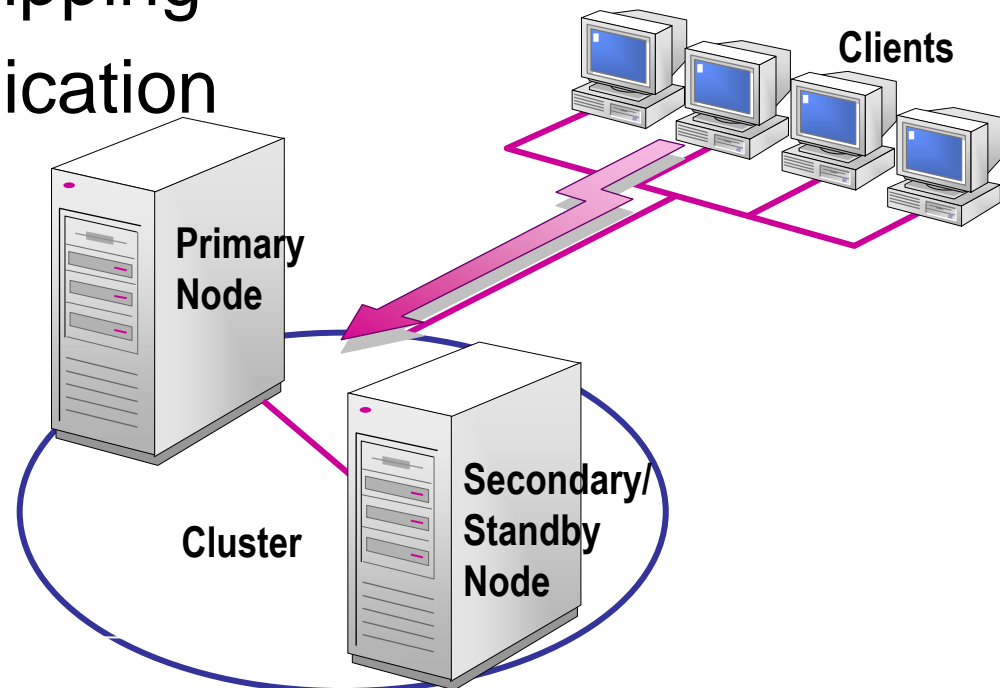

Log-shipping Standby Server

- Also called warm standby
- Primary node
 - serves all queries
 - in permanent archiving mode
 - Continuous sending of WAL records to standby servers
- Standby server
 - serves no queries
 - in permanent recovery mode
 - Continuous processing of WAL records arriving from primary node
- Log shipping can be synchronous/asynchronous
- Disadvantage: all tables are replicated typically
- Advantage: no schema changes, no trigger definitions

Failure of a node

- If standby fails, no action taken.
 - After becoming online, catch-up procedure is started.
- If primary fails, standby server begins failover.
 - Standby applies all WAL records pending,
 - marks itself as primary,
 - starts to serve all queries.
- Heartbeat mechanism
 - to continually verify the connectivity between the two and the viability of the primary server

Failover

- Failover by standby succeeded
 - New standby should be configured
 - Original primary node becomes available
 - → inform it that it is no longer the primary
 - do so-called STONITH (Shoot The Other Node In The Head),
 - otherwise, serious data corruption/loss may occur
 - Typically, old primary becomes new standby

Primary and Standby Servers


- Swap primary and standby regularly
 - To verify recovery steps
 - To do necessary maintenance on standby server
 - SW/HW upgrades, ...

PostgreSQL: Replication

■ TPC Benchmark B

scale factor 1
1 trans. = 5 queries

2x server
(AMD Opteron 8439 SE,
1024 MB RAM,
20 GB HDD)

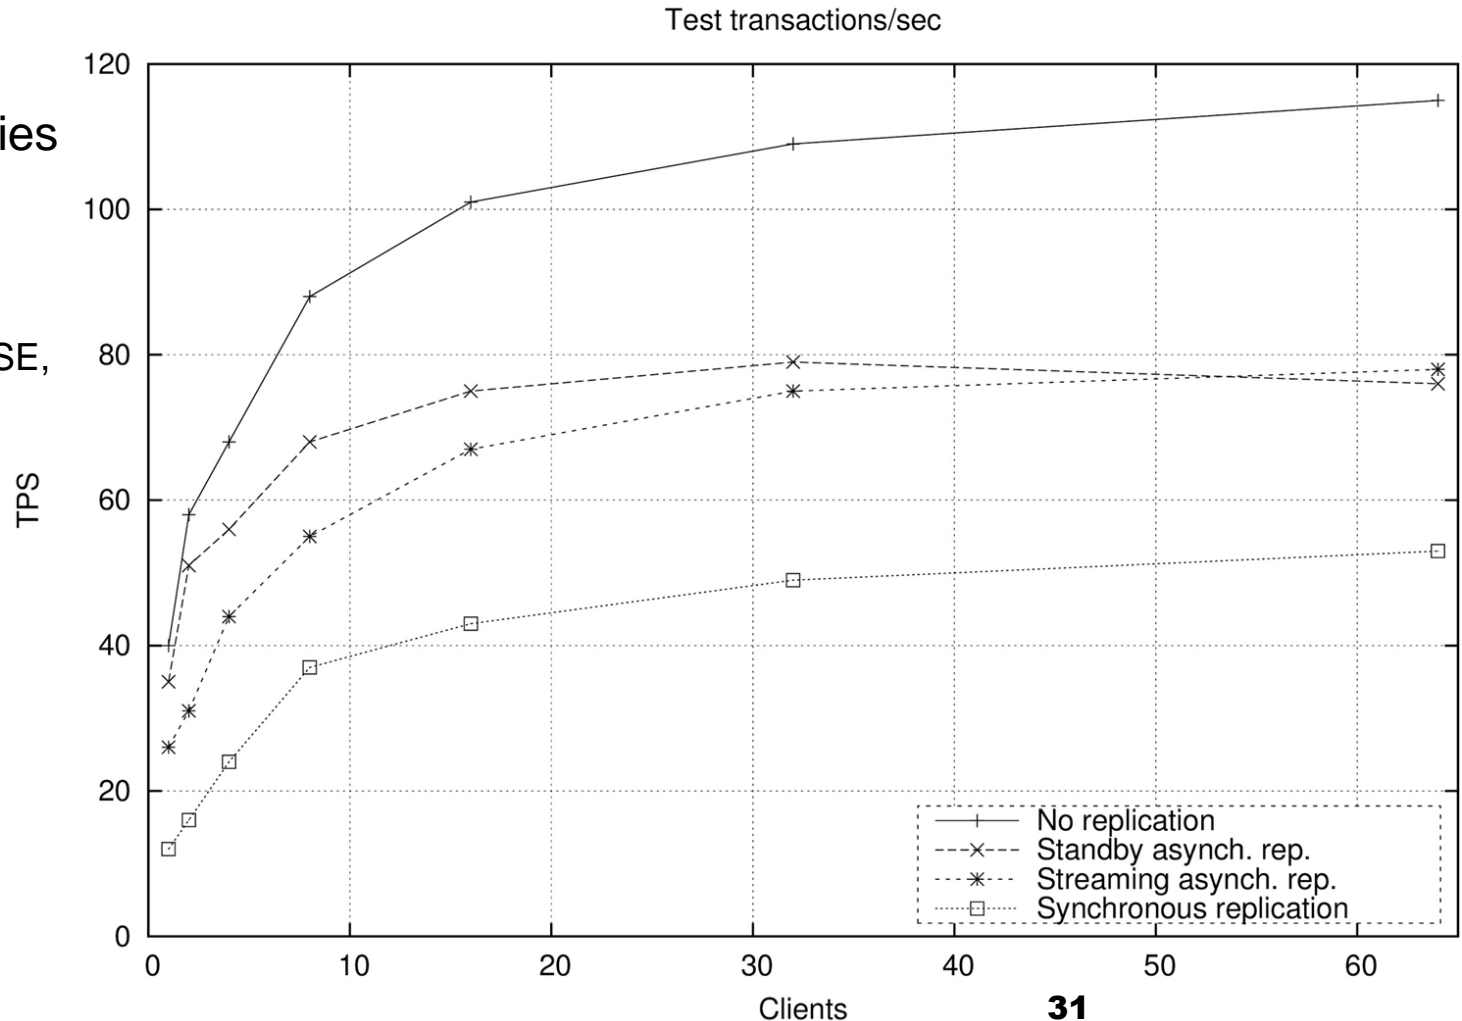

Recommended HA Practices

- Maximize availability at each tier of the application
 - Independent power supply to the primary server
 - Keep standby servers on a different subnet
- Test whether your availability solution works

Lecture Takeaways

- Term of Availability and its classification
- Possible techniques (sharding / replication)
- CAP Theorem & BASE systems
- Know possible implementation in relational DBMS

Lectures ain't over yet! What next?

- Lectures on May 3 and 10 are cancelled. The date May 17 is not valid since there was no public holiday on Wednesday.
- Follow-up courses
 - PV003 Architektura relačních databázových systémů
 - PA128 Similarity Searching in Multimedia Data
 - PA212 Advanced Search Techniques for Large Scale Data Analytics
 - PA195 NoSQL Databases
 - PA220 Data Warehouses
- Research topics for both master thesis or PhD!
 - Research in Motion Capture Data
 - Similarity Operators in Databases
 - AI/machine-learning for data indexes
- Or come and have a chit-chat ((-: