


Probabilistic Graphical Models (PGM)

PA154 Statistické nástroje pro korpusy

Fakulta informatiky


Masarykova Univerzita

Models

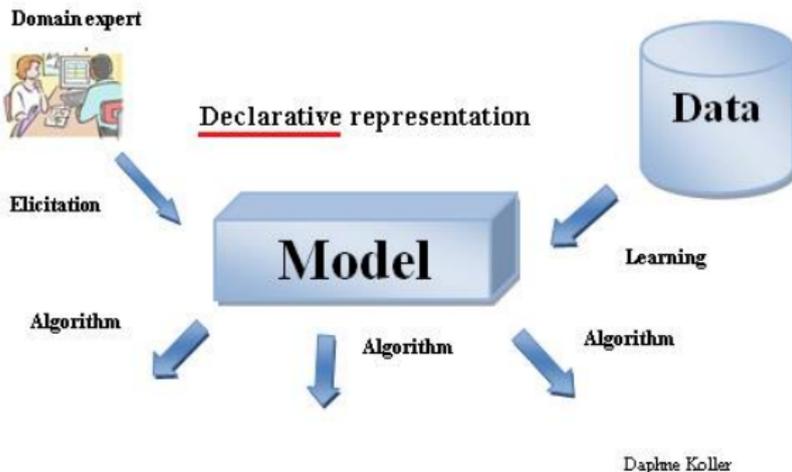


Bayesian networks

X_1, \dots, X_n - nodes
directed graph

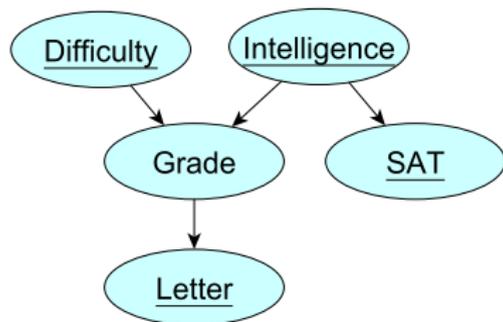

Markov networks


undirected graph

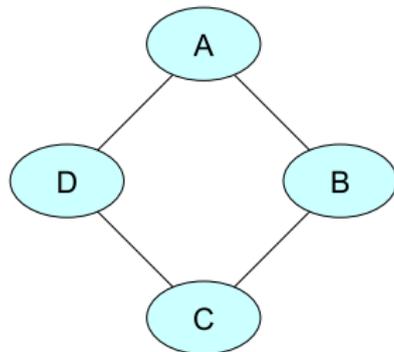

Daphne Koller

Textual Information Extraction

Mrs. Green spoke today in New York. Green chairs the finance committee.
Person Location Person Organization

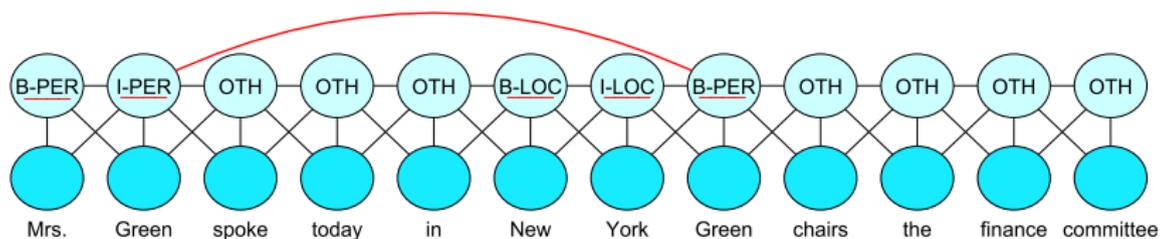


Daphne Koller


Bayesian networks

- Grade
- Course Difficulty
- Student Intelligence
- Student SAT
- Reference Letter

$P(G, D, I, S, L)$

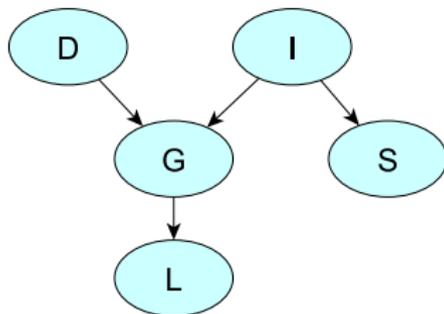


Daphne Koller

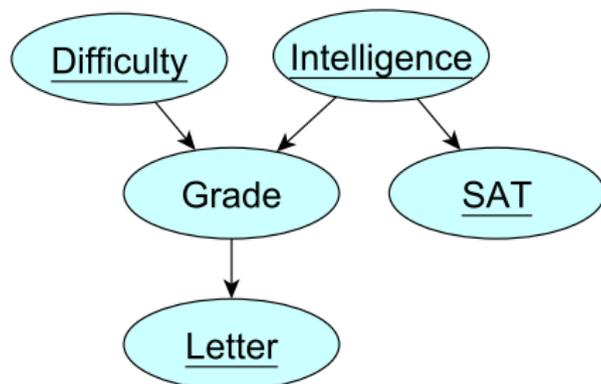


Daphne Koller

Graphical models

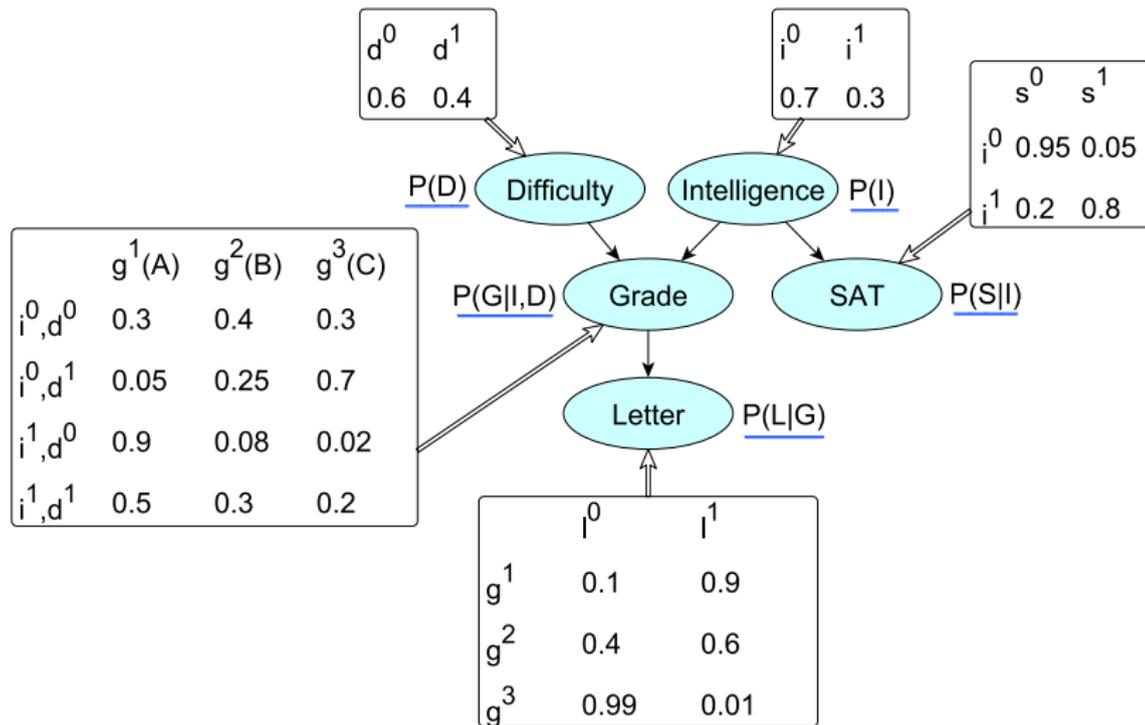

Chain Rule for Bayesian Networks

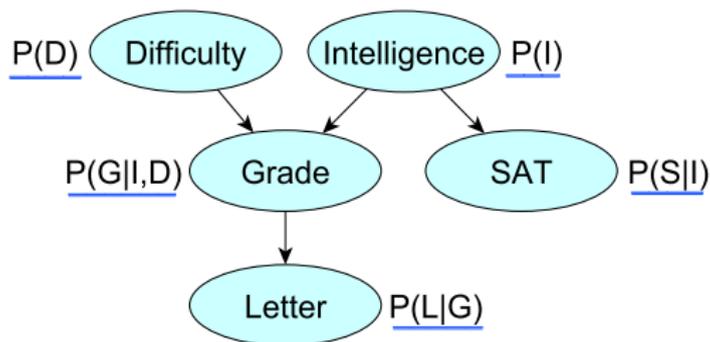


$$\underline{P(D,I,G,S,L)} = P(D)P(I)P(G|I,D)P(S|I)P(L|G)$$

Distribution defined as a product of factors!

Daphne Koller

Chain Rule for Bayesian Networks

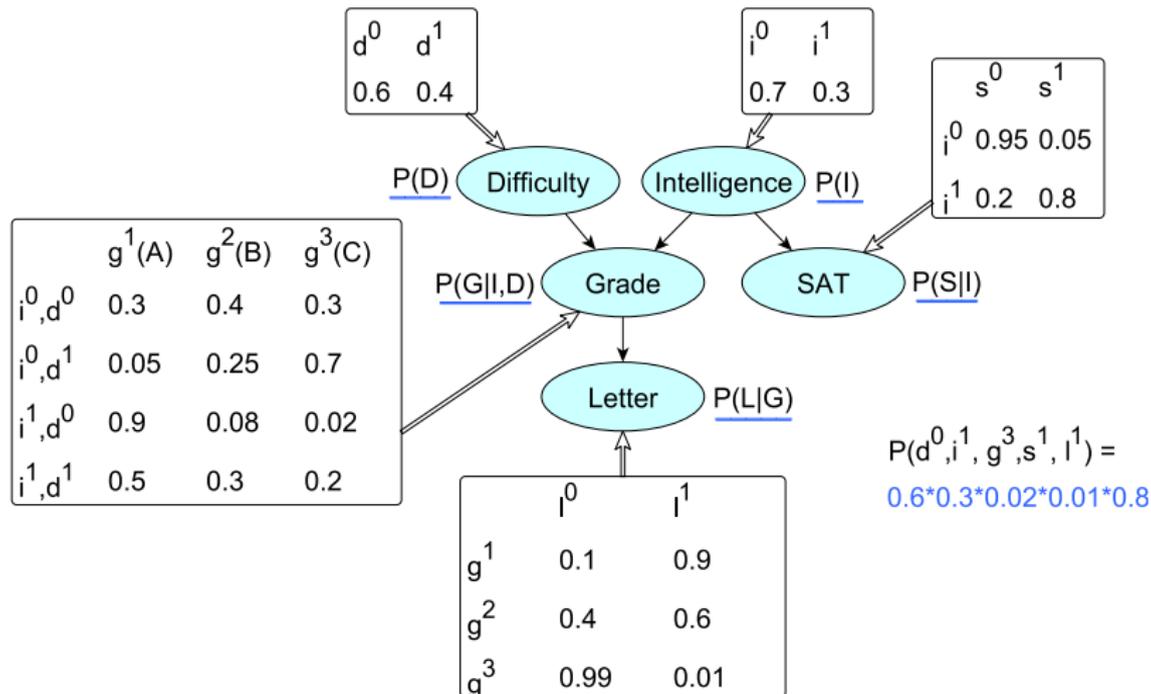

- A Bayesian network is:
 - A directed acyclic graph (DAG) G whose nodes represent random variables X_1, \dots, X_n
 - For each node X_i a CPD $P(X_i | \text{Par}_G(X_i))$
- The BN represents a joint distribution via the chain rule for Bayesian networks

$$P(X_1, \dots, X_n) = \prod_i P(X_i | \text{Par}_G(X_i))$$

BN Is a Legal Distribution: $P \geq 0$

- P is a product of CPDs
- CPDs are non-negative

Daphne Koller

BN Is a Legal Distribution: $\sum P = 1$

$$\begin{aligned}\sum_{D,I,G,S,L} P(D,I,G,S,L) &= \sum_{D,I,G,S,L} P(D)P(I)P(G|I,D)P(S|I)P(L|G) \\ &= \sum_{D,I,G,S} P(D)P(I)P(G|I,D)P(S|I) \cancel{\sum_L P(L|G)} \\ &= \sum_{D,I,G,S} P(D)P(I)P(G|I,D)P(S|I) \\ &= \sum_{D,I,G} P(D)P(I)P(G|I,D) \cancel{\sum_S P(S|I)} \\ &= \sum_{D,I} P(D)P(I) \cancel{\sum_G P(G|I,D)}\end{aligned}$$


Daphne Koller

- Let G be a graph over X_1, \dots, X_n .
- P factorizes over G if

$$P(X_1, \dots, X_n) = \prod_i P(X_i | \text{Par}_G(X_i))$$


Daphne Koller

Naïve Bayes Model

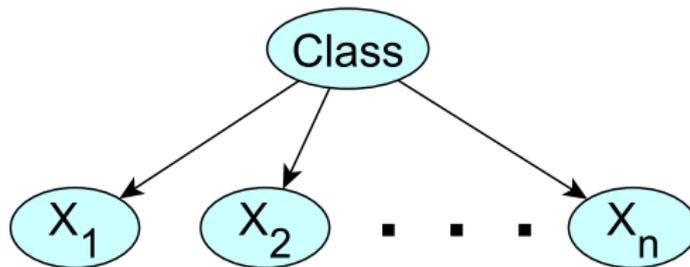

Daphne Koller


Naïve Bayes Classifier

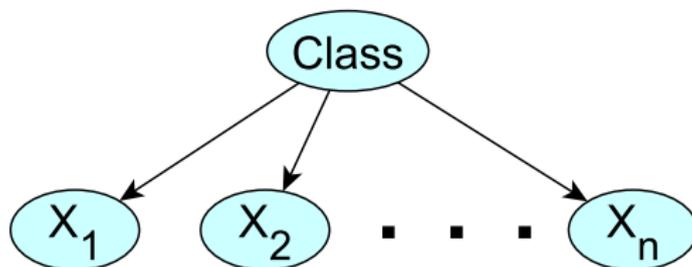

$$\frac{P(C=c^1|x_1,\dots,x_n)}{P(C=c^2|x_1,\dots,x_n)} = \frac{P(C=c^1)}{P(C=c^2)} \prod_{i=1}^n \frac{P(x_i|C=c^1)}{P(x_i|C=c^2)}$$

Daphne Koller


Bernoulli Naïve Bayes for Text

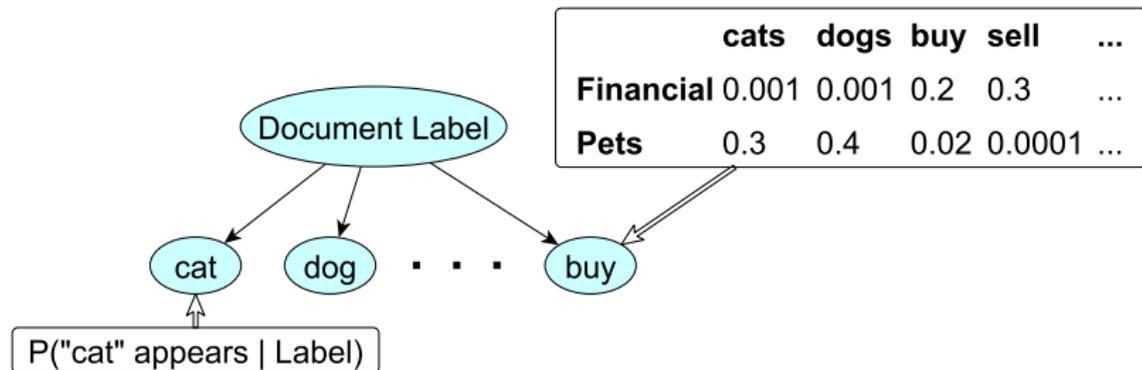

$$\frac{P(C=c^1|x_1,\dots,x_n)}{P(C=c^2|x_1,\dots,x_n)} = \frac{P(C=c^1)}{P(C=c^2)} \prod_{i=1}^n \frac{P(x_i|C=c^1)}{P(x_i|C=c^2)}$$

Daphne Koller

Multinomial Naïve Bayes for Text

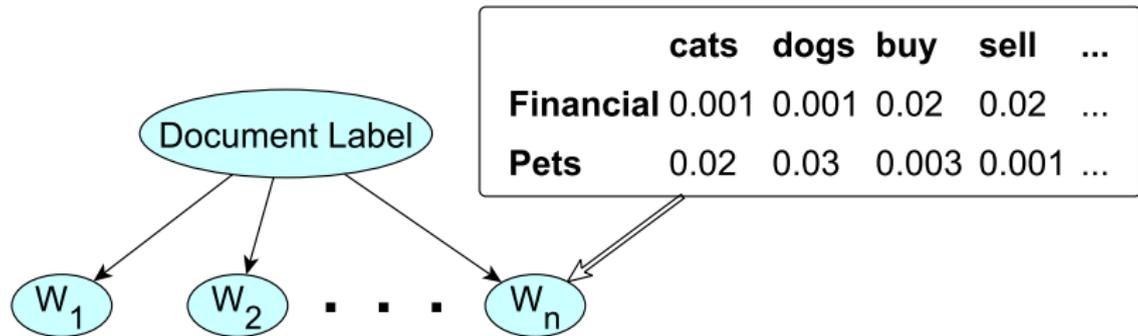


$$\frac{P(C=c^1|x_1,\dots,x_n)}{P(C=c^2|x_1,\dots,x_n)} = \frac{P(C=c^1)}{P(C=c^2)} \prod_{i=1}^n \frac{P(x_i|C=c^1)}{P(x_i|C=c^2)}$$

Daphne Koller

- Simple approach for classification
 - Computationally efficient
 - Easy to construct
- Surprisingly effective in domains with many weakly relevant features
- Strong independence assumptions reduce performance when many features are strongly correlated

Daphne Koller

Probabilistic
Graphical
Models

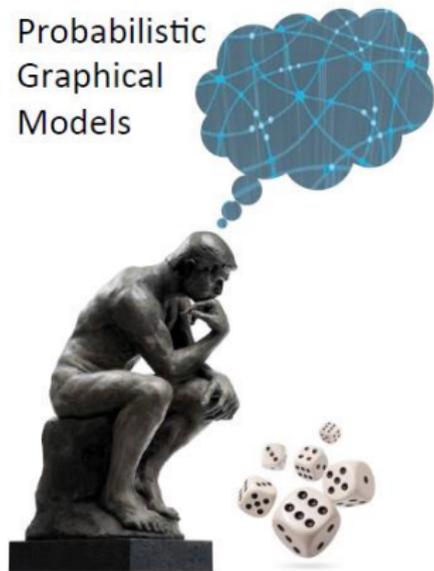

Representation
Bayesian Networks

Application: Diagnosis

Daphne Koller

Medical Diagnosis: Pathfinder (1992)

- Help pathologist diagnose lymph node pathologies (60 different diseases)
- Pathfinder I: Rule-based system
- Pathfinder II used naïve Bayes and got superior performance

Daphne Koller

- Pathfinder III: Naïve Bayes with better knowledge engineering
- No incorrect zero probabilities
- Better calibration of conditional probabilities
 - $P(\text{finding} \mid \text{disease}_1)$ to $P(\text{finding} \mid \text{disease}_2)$
 - Not $P(\text{finding}_1 \mid \text{disease})$ to $P(\text{finding}_2 \mid \text{disease})$

Heckerman et al.

Daphne Koller

Medical Diagnosis: Pathfinder (1992)

- Pathfinder IV: Full Bayesian network
 - Removed incorrect independencies;
 - Additional parents led to more accurate estimation of probabilities
- BN model agreed with expert panel in 50/53 cases, vs 47/53 for naïve Bayes model
- Accuracy as high as expert that designed the model

Heckerman et al.

Daphne Koller