



# Chapter 3: Dynamic Routing

## Instructor Materials


CCNA Routing and Switching

Routing and Switching Essentials v6.0



# Chapter 3: Dynamic Routing

**Routing and Switching Essentials v6.0**  
**Planning Guide**

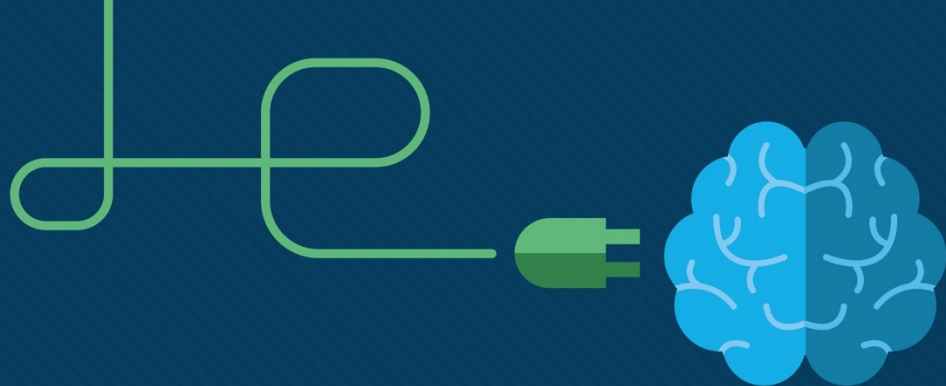

# Chapter 3: Dynamic Routing

CCNA Routing and Switching

Routing and Switching Essentials v6.0



# Chapter 3 - Sections & Objectives

- 3.1 Dynamic Routing Protocols
  - Explain the function of dynamic routing protocols.
  - Explain the purpose of dynamic routing protocols.
  - Explain the use of dynamic routing and static routing.
- 3.2 RIPv2
  - Implement RIPv2.
  - Configure the RIPv2 routing protocol.
- 3.3 The Routing Table
  - Determine the route source, administrative distance, and metric for a given route.
  - Explain the components of an IPv4 routing table entry for a given route.
  - Explain the parent/child relationship in a dynamically built routing table.
  - Determine which route will be used to forward a IPv4 packet.
  - Determine which route will be used to forward a IPv6 packet.


# 3.1 Dynamic Routing Protocols

# Dynamic Routing Protocol Overview

	Interior Gateway Protocols				Exterior Gateway Protocols
	Distance Vector		Link-State		Path Vector
IPv4	RIPv2	EIGRP	OSPFv2	IS-IS	BGP-4
IPv6	RIPng	EIGRP for IPv6	OSPFv3	IS-IS for IPv6	BGP-MP

- RIP protocol was updated to RIPv2 to accommodate growth in the network environment
  - RIPv2 does not scale to current larger network implementations
- Routing Protocols developed to meet the need of larger networks include:
  - Open Shortest Path First (OSPF)
  - Intermediate System-to-Intermediate System (IS-IS).
  - Enhanced IGRP (EIGRP)
- Border Gateway Protocol (BGP) is used between Internet service providers (ISPs)

# Dynamic Routing Protocol Components

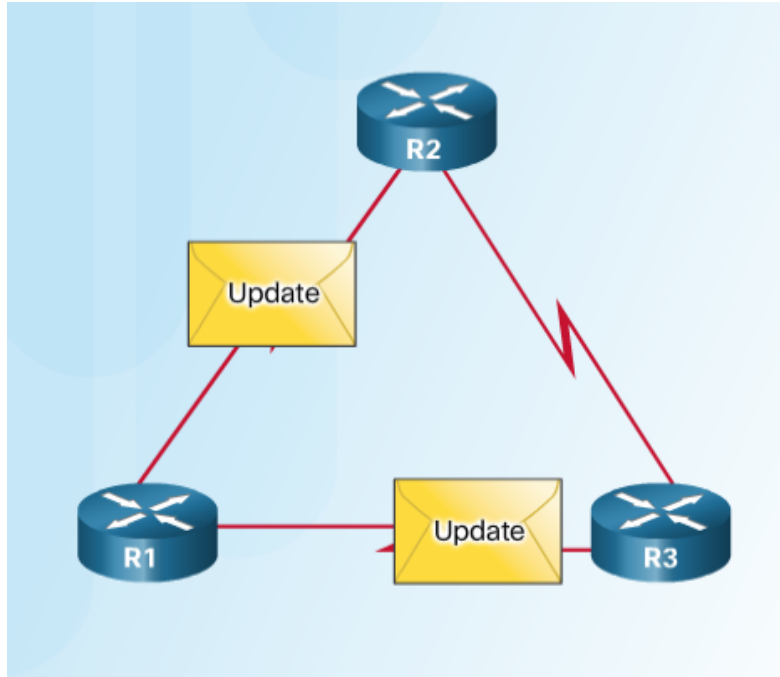


- Purpose of dynamic routing protocols includes:
  - Discovery of remote networks
  - Maintaining up-to-date routing information
  - Choosing the best path to destination networks
  - Ability to find a new best path if the current path is no longer available
- The main components of dynamic routing protocols include:
  - Data structures - tables or databases kept in RAM.
  - Routing protocol messages - to discover neighboring routers, exchange routing information, and maintain accurate information about the network.
  - Algorithms – to facilitate learning routing information and for best path determination.

# Dynamic versus Static Routing

## Static Routing Uses

- Networks often use both static and dynamic routing.
- Static Routing is used as follows:
  - For easy routing table maintenance in small networks.
  - Routing to and from a stub network.
  - Accessing a single default route.

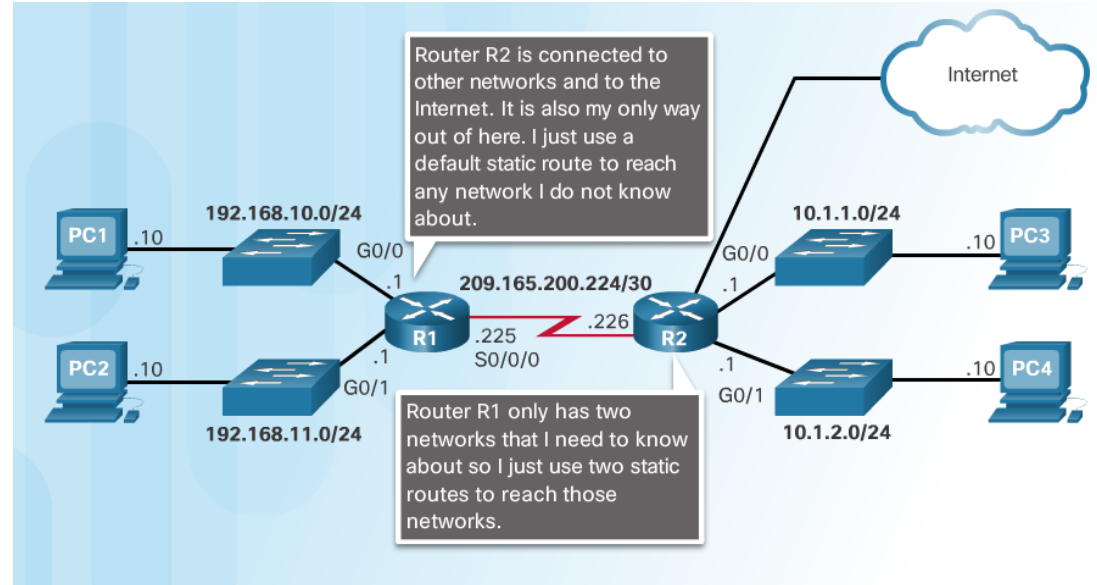




# Static Routing Advantages and Disadvantages

Advantages	Disadvantages
Easy to implement in a small network.	Suitable only for simple topologies or for special purposes such as a default static route.
Very secure. No advertisements are sent as compared to dynamic routing protocols.	Configuration complexity increases dramatically as network grows.
Route to destination is always the same.	Manual intervention required to re-route traffic.
No routing algorithm or update mechanism required; therefore, extra resources (CPU or RAM) are not required.	

# Dynamic Routing Protocols Uses

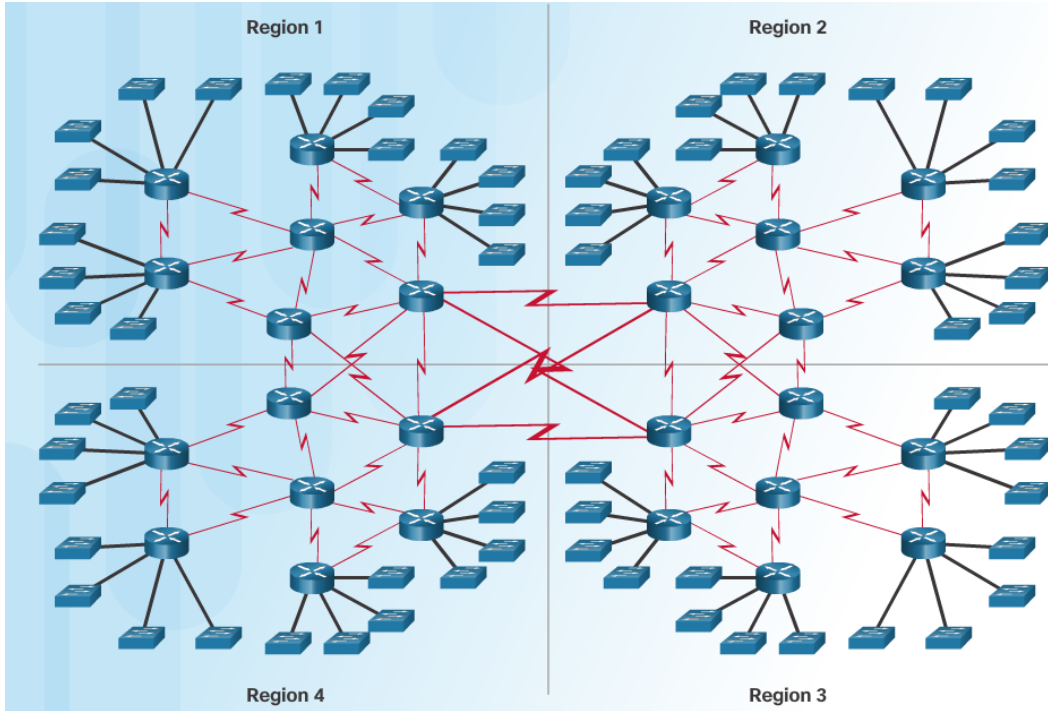

- Dynamic routing is the best choice for large networks
- Dynamic routing protocols help the network administrator manage the network:
  - Providing redundant paths
  - Automatically implementing the alternate path when a link goes down.

# Dynamic Routing Advantages and Disadvantages

Advantages	Disadvantages
Suitable in all topologies where multiple routers are required.	Can be more complex to implement.
Generally independent of the network size.	Less secure. Additional configuration settings are required to secure.
Automatically adapts topology to reroute traffic if possible.	Route depends on the current topology.
	Requires additional CPU, RAM, and link bandwidth.

# 3.2 RIPv2

# Dynamic versus Static Routing

## Router RIP Configuration Mode

- Use the **router rip** command to enable RIP v1

```
R1# conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)# router rip
R1(config-router)#
```

- Use the **no router rip** command to disable RIP


### RIP Configuration Options

```
R1(config-router)# ?
Router configuration commands:
address-family      Enter Address Family command mode
auto-summary       Enable automatic network number summarization
default            Set a command to its defaults
default-information Control distribution of default information
default-metric     Set metric of redistributed routes
distance           Define an administrative distance
distribute-list    Filter networks in routing updates
exit              Exit from routing protocol configuration mode
flash-update-threshold Specify flash update threshold in second
help              Description of the interactive help system
input-queue       Specify input queue depth
maximum-paths     Forward packets over multiple paths
neighbor         Specify a neighbor router
network          Enable routing on an IP network
no              Negate a command or set its defaults
offset-list      Add or subtract offset from RIP metrics
output-delay     Interpacket delay for RIP updates
passive-interface Suppress routing updates on an interface
redistribute     Redistribute information from another routing protocol
timers          Adjust routing timers
traffic-share    How to compute traffic share over alternate paths
validate-update-source Perform sanity checks against source address of routing updates
version         Set routing protocol version

R1(config-router)#
```

# Configuring the RIP Protocol

## Advertise Networks

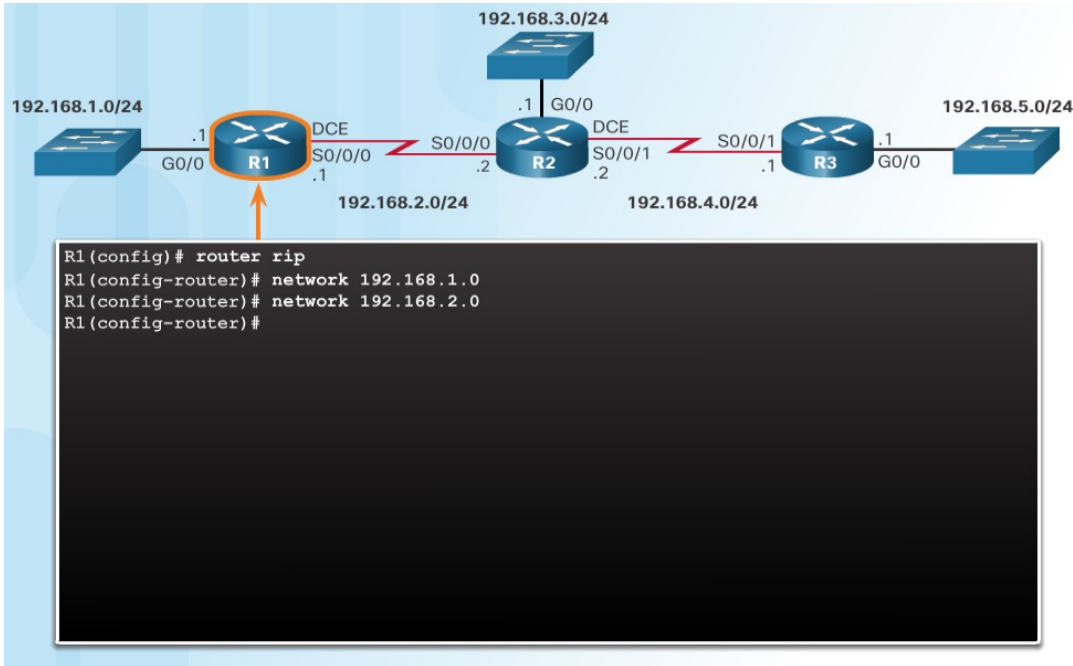

- The **network network-address** router configuration mode command:
  - Enables RIP on all interfaces that belong to a specific network
  - Advertises the network in RIP routing updates sent to other routers every 30 seconds.

**Note:** RIPv1 is a classful routing protocol for IPv4.

# Configuring the RIP Protocol

## Verify RIP Routing

```
R1# show ip protocols
*** IP Routing is NSF aware ***

Routing Protocol is "rip"
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Sending updates every 30 seconds, next due in 16 seconds
  Invalid after 180 seconds, hold down 180, flushed after 240
  Redistributing: rip

  Default version control: send version 1, receive any version
    Interface        Send Recv Triggered RIP Key-chain
  GigabitEthernet0/0  1     1 2
  Serial0/0/0        1     1 2

  Automatic network summarization is in effect
  Maximum path: 4
  Routing for Networks:
    192.168.1.0
    192.168.2.0

  Routing Information Sources:
    Gateway         Distance    Last Update
    192.168.2.2      120        00:00:15
  Distance: (default is 120)

R1#
```

**show ip protocols** – displays IPv4 routing protocols configured on the router.


```
R1# show ip route | begin Gateway
Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
  C   192.168.1.0/24 is directly connected,
  GigabitEthernet0/0
  L   192.168.1.1/32 is directly connected,
  GigabitEthernet0/0
    192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
  C   192.168.2.0/24 is directly connected, Serial0/0/0
  L   192.168.2.1/32 is directly connected, Serial0/0/0
  R   192.168.3.0/24 [120/1] via 192.168.2.2, 00:00:24,
  Serial0/0/0
  R   192.168.4.0/24 [120/1] via 192.168.2.2, 00:00:24,
  Serial0/0/0
  R   192.168.5.0/24 [120/2] via 192.168.2.2, 00:00:24,
  Serial0/0/0
R1#
```

**show ip route** – displays RIP routes installed in the routing table.

# Configuring the RIP Protocol

## Enable and Verify RIPv2

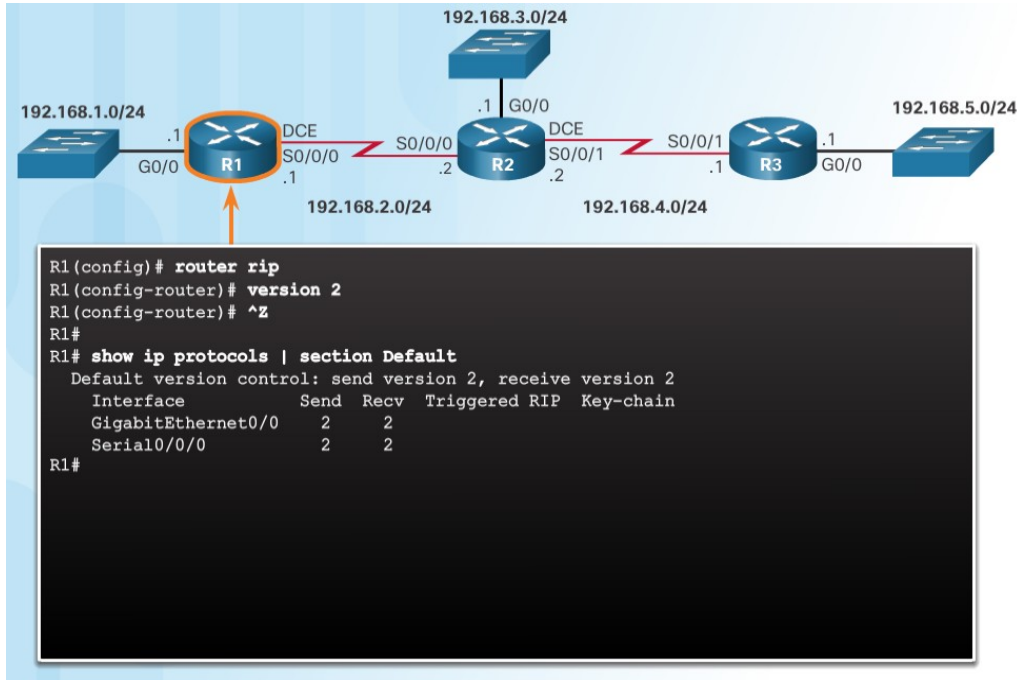


- Use the **version 2** router configuration mode command to enable RIPv2
- Use the **show ip protocols** command to verify that RIPv2 is configured.
- Use the **show ip route** command to verify the RIPv2 routes in the routing table.



# Configuring the RIP Protocol

## Disable Auto Summarization

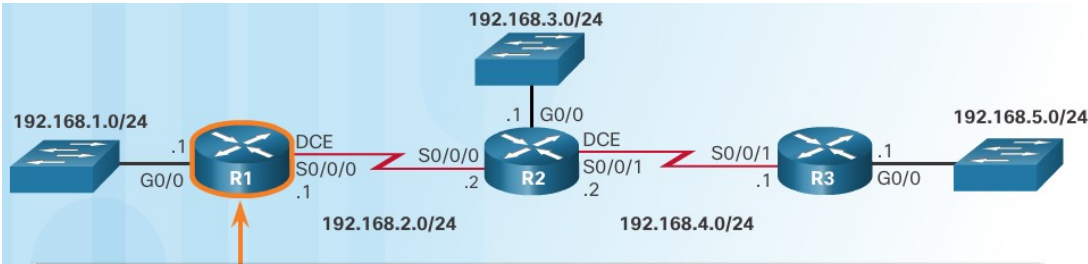


```
R1(config)# router rip
R1(config-router)# no auto-summary
R1(config-router)# end
R1#
*Mar 10 14:11:49.659: %SYS-5-CONFIG_I: Configured from
console by console
R1# show ip protocols | section Automatic
  Automatic network summarization is not in effect
R1#
```

- RIPv2 automatically summarizes networks at major network boundaries.
- Use the **no auto-summary** router configuration mode command to disable auto summarization.
- Use the **show ip protocols** command to verify that auto summarization is off.

# Configuring the RIP Protocol

## Configure Passive Interfaces

- RIP updates:
  - Are forwarded out all RIP-enabled interfaces by default.
  - Only need to be sent out interfaces that are connected to other RIP-enabled routers.
- Sending RIP updates to LANs wastes bandwidth, wastes resources, and is a security risk.
- Use the **passive-interface** router configuration command to stop routing updates out the interface. Still allows that network to be advertised to other routers.

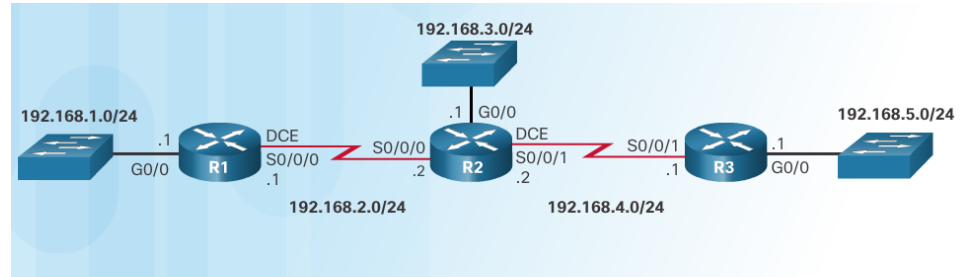


```
R1(config)# router rip
R1(config-router)# passive-interface g0/0
R1(config-router)# end
R1#
R1# show ip protocols | begin Default
Default version control: send version 2, receive version 2
Interface          Send Recv Triggered RIP Key-
chain
Serial0/0/0        2      2
Automatic network summarization is not in effect
Maximum path: 4
Routing for Networks:
 192.168.1.0
 192.168.2.0
Passive Interface(s):
 GigabitEthernet0/0
Routing Information Sources:
Gateway          Distance    Last Update
192.168.2.2      120        00:00:06
Distance: (default is 120)

R1#
```

# Configuring the RIP Protocol

## Propagate a Default Route

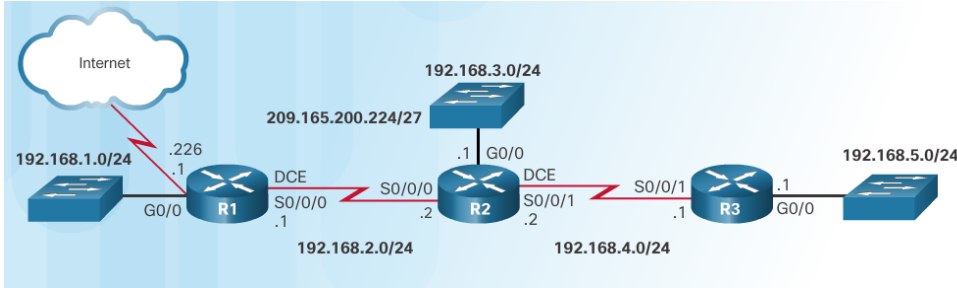

- In the diagram a default static route to the Internet is configured on R1.
- The **default-information originate** router configuration command instructs R1 to send the default static route information in the RIP updates.

```
R1(config)# ip route 0.0.0.0 0.0.0.0 S0/0/1 209.165.200.226
R1(config)# router rip
R1(config-router)# default-information originate
R1(config-router)# ^Z
R1#
*Mar 10 23:33:51.801: %SYS-5-CONFIG_I: Configured from console by console
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.226 to network 0.0.0.0

S* 0.0.0.0/0 [1/0] via 209.165.200.226, Serial0/0/1
  192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C   192.168.1.0/24 is directly connected, GigabitEthernet0/0
L   192.168.1.1/32 is directly connected, GigabitEthernet0/0
  192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C   192.168.2.0/24 is directly connected, Serial0/0/0
L   192.168.2.1/32 is directly connected, Serial0/0/0
R   192.168.3.0/24 [120/1] via 192.168.2.2, 00:00:08, Serial0/0/0
R   192.168.4.0/24 [120/1] via 192.168.2.2, 00:00:08, Serial0/0/0
R   192.168.5.0/24 [120/2] via 192.168.2.2, 00:00:08, Serial0/0/0
  209.165.200.0/24 is variably subnetted, 2 subnets, 2 masks
C   209.165.200.0/24 is directly connected, Serial0/0/1
L   209.165.200.225/27 is directly connected, Serial0/0/1
R1#
```


# Configuring the RIP Protocol

## Packet Tracer - Configuring RIPv2



### Packet Tracer – Configuring RIPv2

#### Topology

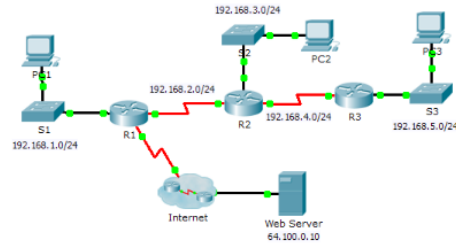

#### Objectives

Part 1: Configure RIPv2

Part 2: Verify Configurations

#### Background

Although RIP is rarely used in modern networks, it is useful as a foundation for understanding basic network routing. In this activity, you will configure a default route, RIPv2, with appropriate network statements and passive interfaces, and verify full connectivity.

#### Part 1: Configure RIPv2

##### Step 1: Configure RIPv2 on R1.

- Use the appropriate command to create a default route on **R1** for all Internet traffic to exit the network through S0/0/1.
- Enter RIP protocol configuration mode.
- Use version 2 of the RIP protocol and disable the summarization of networks.
- Configure RIP for the networks that connect to **R1**.
- Configure the LAN port that contains no routers so that it does not send out any routing information.
- Advertise the default route configured in step 1a with other RIP routers.
- Save the configuration.

# Configuring the RIP Protocol

## Lab - Configuring Basic RIPv2




Cisco Networking Academy™

Mind Wide Open™

### Lab – Configuring Basic RIPv2


Topology

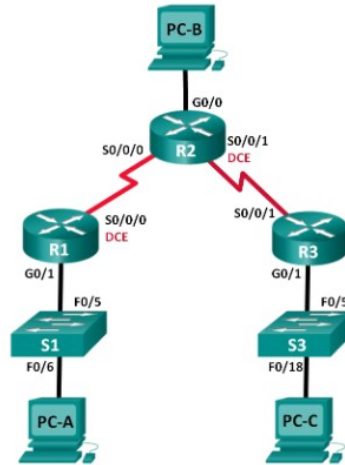

# 3.3 The Routing Table

# Parts of an IPv4 Route Entry

## Routing Table Entries

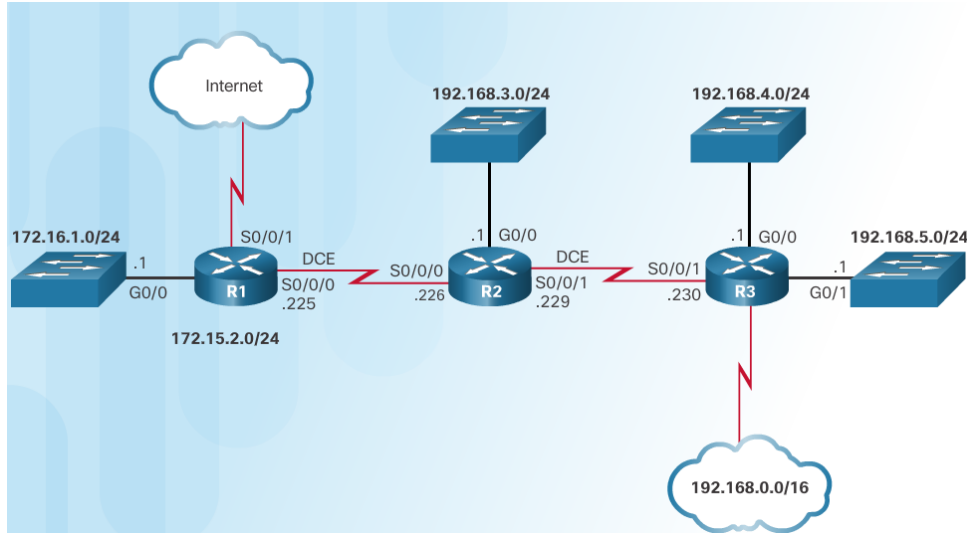

```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S* 0.0.0.0/0 [1/0] via 209.165.200.234, Serial0/0/1
   is directly connected, Serial0/0/1
C 172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
C 172.16.1.0/24 is directly connected, GigabitEthernet0/0
L 172.16.1.1/32 is directly connected, GigabitEthernet0/0
R 172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
R 172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R 172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R 192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial0/0/0
C 209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C 209.165.200.224/30 is directly connected, Serial0/0/0
L 209.165.200.225/32 is directly connected, Serial0/0/0
R 209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
C 209.165.200.232/30 is directly connected, Serial0/0/1
L 209.165.200.233/30 is directly connected, Serial0/0/1
R1#
```




Routing Table for R1

# Parts of an IPv4 Route Entry

## Directly Connected Entries

Route Source	Destination Network	Outgoing Interface
C	172.16.1.0/24 is directly connected,	GigabitEthernet0/0
L	172.16.1.1/32 is directly connected,	GigabitEthernet0/0


Legend
 - Identifies how the network was learned by the router.
 - Identifies the destination network and how it is connected.
 - Identifies the interface on the router connected to the destination network.

- Directly Connected Networks (C) are automatically added to the routing table when the interface is configured and activated.
- Entries contain the following information:
  - Route source - how the route was learned.
  - Destination network – remote network.
  - Outgoing Interface – exit interface used to forward packets to destination.
- Other route source entries include:
  - S –Static Route
  - D – EIGRP routing protocol
  - O – OSPF routing protocol
  - R - RIP routing protocol



# Parts of an IPv4 Route Entry

## Remote Network Entries

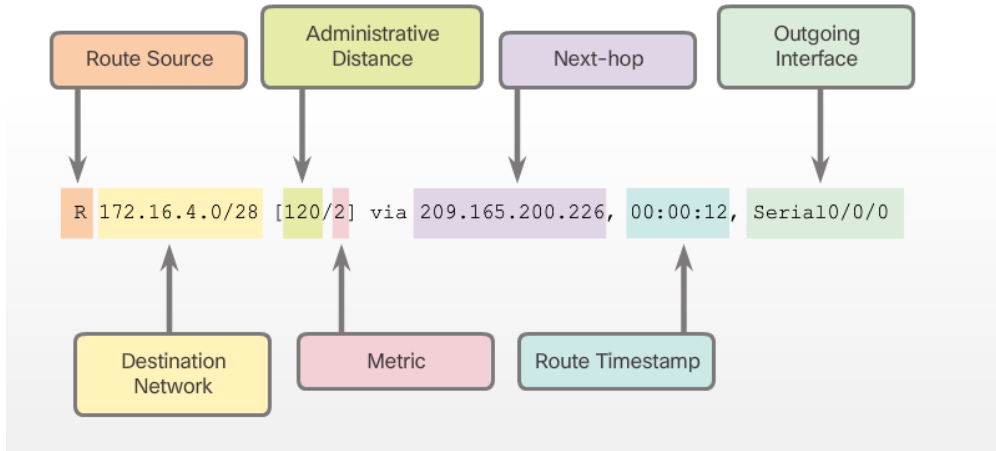

- Routes to remote networks contain the following information:
  - Route source – how route was learned
  - Destination network
  - Administrative distance (AD) - trustworthiness of the route.
  - Metric – value assigned to reach the remote network. Lower is better.
  - Next hop – IPv4 address of the next router that the packet should be forwarded to.
  - Route timestamp – time since the route was updated.
  - Outgoing interface - the exit interface to use to forward the packet

# Dynamically Learned IPv4 Routes

## Routing Table Terms

- The routing table is a hierarchical structure that is used to speed up the lookup process when locating routes and forwarding packets.
- The hierarchy includes:
  - Ultimate Routes
  - Level 1 routes
  - Level 1 parent routes
  - Level 2 child routes

```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S*   0.0.0.0/0 [1/0] via 209.165.200.234, Serial10/0/1
      is directly connected, Serial10/0/1
      172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
C     172.16.1.0/24 is directly connected, GigabitEthernet0/0
L     172.16.1.1/32 is directly connected, GigabitEthernet0/0
R     172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial10/0/0
R     172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial10/0/0
R     172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial10/0/0
R     192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial10/0/0
      209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C     209.165.200.224/30 is directly connected, Serial10/0/0
L     209.165.200.225/32 is directly connected, Serial10/0/0
R     209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial10/0/0
C     209.165.200.232/30 is directly connected, Serial10/0/1
L     209.165.200.233/32 is directly connected, Serial10/0/1
R1#
```

# Dynamically Learned IPv4 Routes

## Ultimate Route


- An ultimate route is a routing table entry that contains either a next-hop IPv4 address or an exit interface.
- Directly connected, dynamically learned, and local routes are ultimate routes.

```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S*   0.0.0.0/0 [1/0] via 209.165.200.234, Serial0/0/1
      is directly connected, Serial0/0/1
C    172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
C    172.16.1.0/24 is directly connected, GigabitEthernet0/0
L    172.16.1.1/32 is directly connected, GigabitEthernet0/0
R    172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial0/0/0
209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C    209.165.200.224/30 is directly connected, Serial0/0/0
L    209.165.200.225/32 is directly connected, Serial0/0/0
R    209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
C    209.165.200.232/30 is directly connected, Serial0/0/1
L    209.165.200.233/32 is directly connected, Serial0/0/1
R1#
```

# Dynamically Learned IPv4 Routes

## Level 1 Route

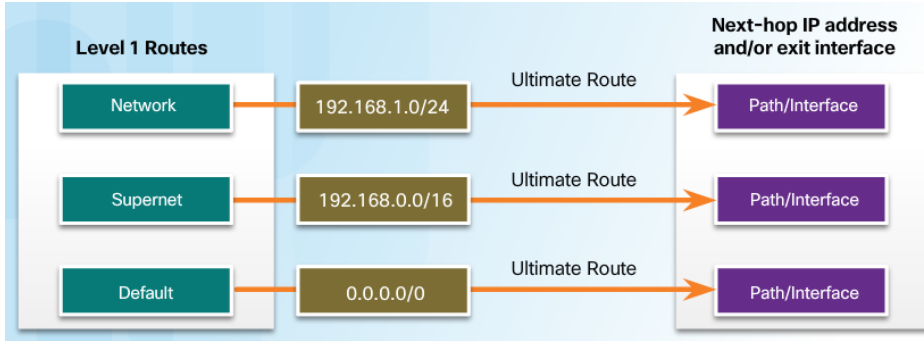


```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S*   0.0.0.0/0 [1/0] via 209.165.200.234, Serial0/0/1
      is directly connected, Serial0/0/1
C    172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
L    172.16.1.0/24 is directly connected, GigabitEthernet0/0
L    172.16.1.1/32 is directly connected, GigabitEthernet0/0
R    172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial0/0/0
      209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C    209.165.200.224/30 is directly connected, Serial0/0/0
L    209.165.200.225/32 is directly connected, Serial0/0/0
R    209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
C    209.165.200.232/30 is directly connected, Serial0/0/1
L    209.165.200.233/32 is directly connected, Serial0/0/1
R1#
```

- A level 1 route can be a:
  - **Network route** - a network route that has a subnet mask equal to that of the classful mask.
  - **Supernet route** - a network address with a mask less than the classful mask, for example, a summary address.
  - **Default route** - a static route with the address 0.0.0.0/0

# Dynamically Learned IPv4 Routes

## Level 1 Parent Route

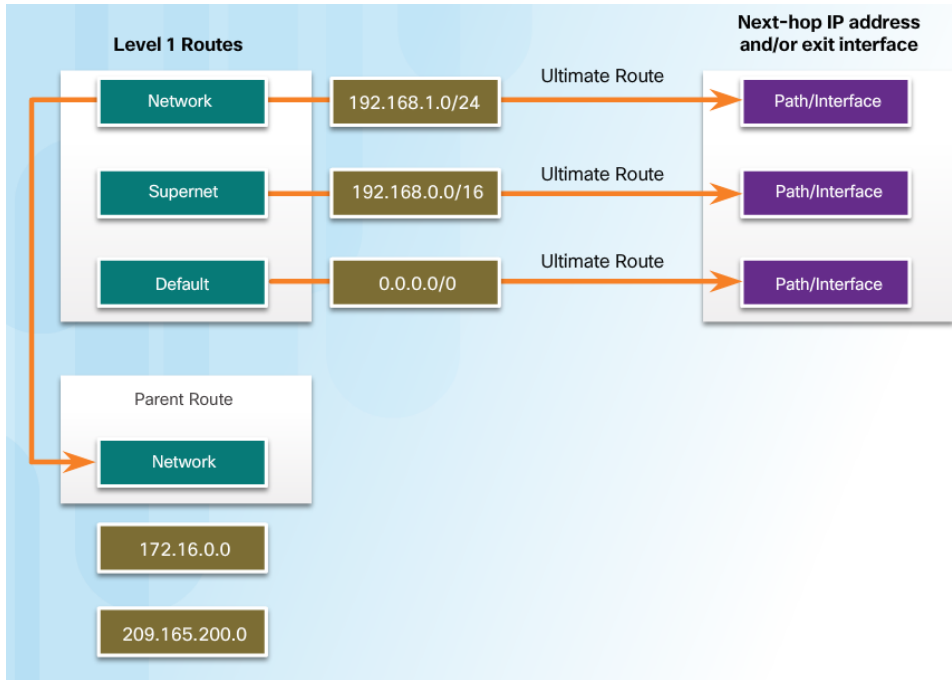


- A parent route is a level 1 network route that is subnetted.
- In the routing table, it basically provides a heading for the specific subnets it contains.

```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S*   0.0.0.0/0 [1/0] via 209.165.200.234, Serial0/0/1
      is directly connected, Serial0/0/1
      172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
C    172.16.1.0/24 is directly connected, GigabitEthernet0/0
L    172.16.1.1/32 is directly connected, GigabitEthernet0/0
R    172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R    192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial0/0/0
      209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C    209.165.200.224/30 is directly connected, Serial0/0/0
L    209.165.200.225/32 is directly connected, Serial0/0/0
R    209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
C    209.165.200.232/30 is directly connected, Serial0/0/1
L    209.165.200.233/32 is directly connected, Serial0/0/1
R1#
```

# Dynamically Learned IPv4 Routes

## Level 2 Child Route

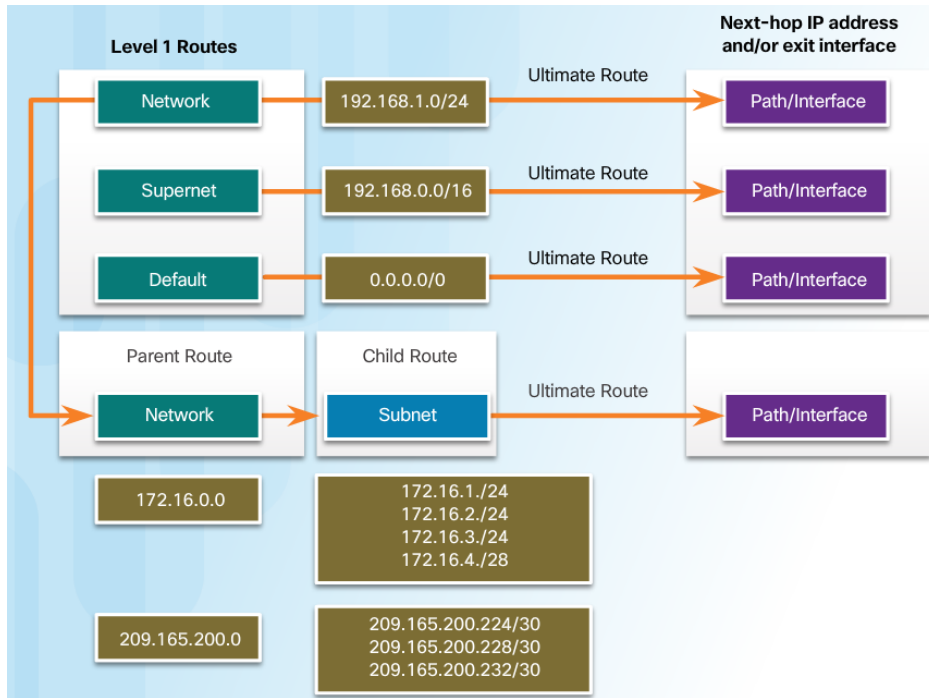


- A level 2 child route is a route that is a subnet of a classful network address.
- Level 1 parent routes contain level 2 child routes.
- Level 2 child routes are also ultimate routes.

```
R1# show ip route | begin Gateway
Gateway of last resort is 209.165.200.234 to network 0.0.0.0

S* 0.0.0.0/0 [1/0] via 209.165.200.234, Serial0/0/1
    is directly connected, Serial0/0/1
C 172.16.0.0/16 is variably subnetted, 5 subnets, 3 masks
C 172.16.1.0/24 is directly connected, GigabitEthernet0/0
L 172.16.1.1/32 is directly connected, GigabitEthernet0/0
R 172.16.2.0/24 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
R 172.16.3.0/24 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R 172.16.4.0/28 [120/2] via 209.165.200.226, 00:00:12, Serial0/0/0
R 192.168.0.0/16 [120/2] via 209.165.200.226, 00:00:03, Serial0/0/0
C 209.165.200.0/24 is variably subnetted, 5 subnets, 2 masks
C 209.165.200.224/30 is directly connected, Serial0/0/0
L 209.165.200.225/32 is directly connected, Serial0/0/0
R 209.165.200.228/30 [120/1] via 209.165.200.226, 00:00:12, Serial0/0/0
C 209.165.200.232/30 is directly connected, Serial0/0/1
L 209.165.200.233/30 is directly connected, Serial0/0/1
R1#
```

# The IPv4 Route Lookup Process

## Route Lookup Process

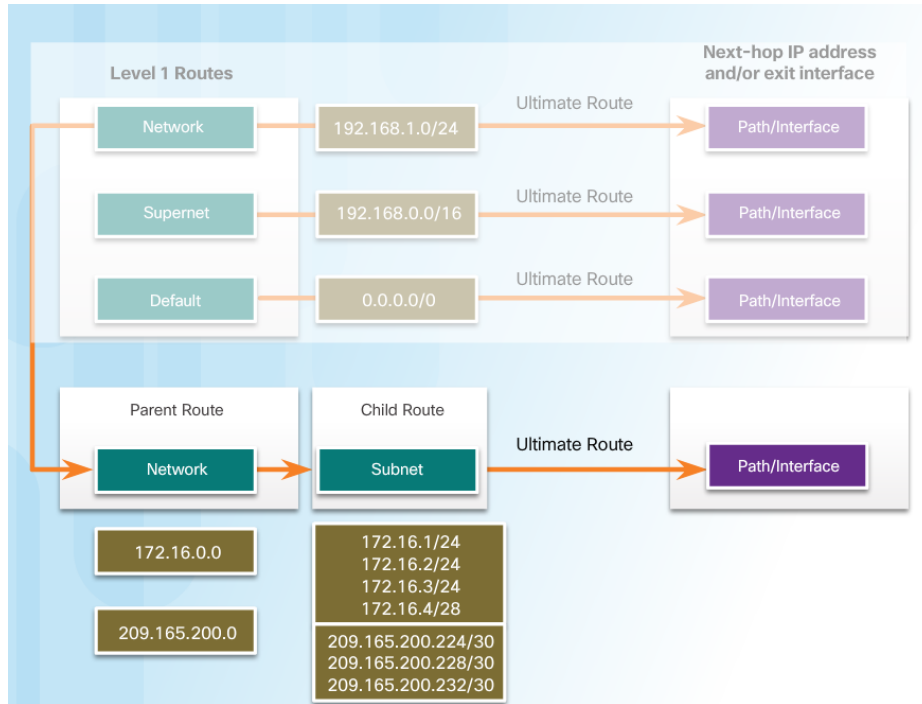

- Router lookup process:
  - If the best match is a level 1 ultimate route, then this route is used to forward the packet.
  - If the best match is a level 1 parent route, the router then examines child routes (the subnet routes).
  - If there is a match with a level 2 child route, that is used to forward the packet.
  - If there is no match with level 2 child routes, the router searches level 1 supernet or default routes. If there is a match, that route is used.
  - If there is no match found in the routing table the packet is dropped.

## The IPv4 Route Lookup Process

# Best Route = Longest Match

- The best match is the route in the routing table that has the most number of far left matching bits with the destination IPv4 address of the packet.
- The route with the greatest number of equivalent far left bits, or the longest match, is always the preferred route.

IP Packet Destination	172.16.0.10	10101100.00010000.00000000.00001010
Route 1	172.16.0.0/12	10101100.00010000.00000000.00000000
Route 2	172.16.0.0/18	10101100.00010000.00000000.00000000
Route 3	172.16.0.0/26	10101100.00010000.00000000.00000000


Longest Match to IP Packet Destination



# Analyze an IPv6 Routing Table

## IPv6 Routing Table Entries

- An IPv6 routing table includes directly connected, static and dynamically learned routes.
- All IPv6 routes are level 1 ultimate routes.

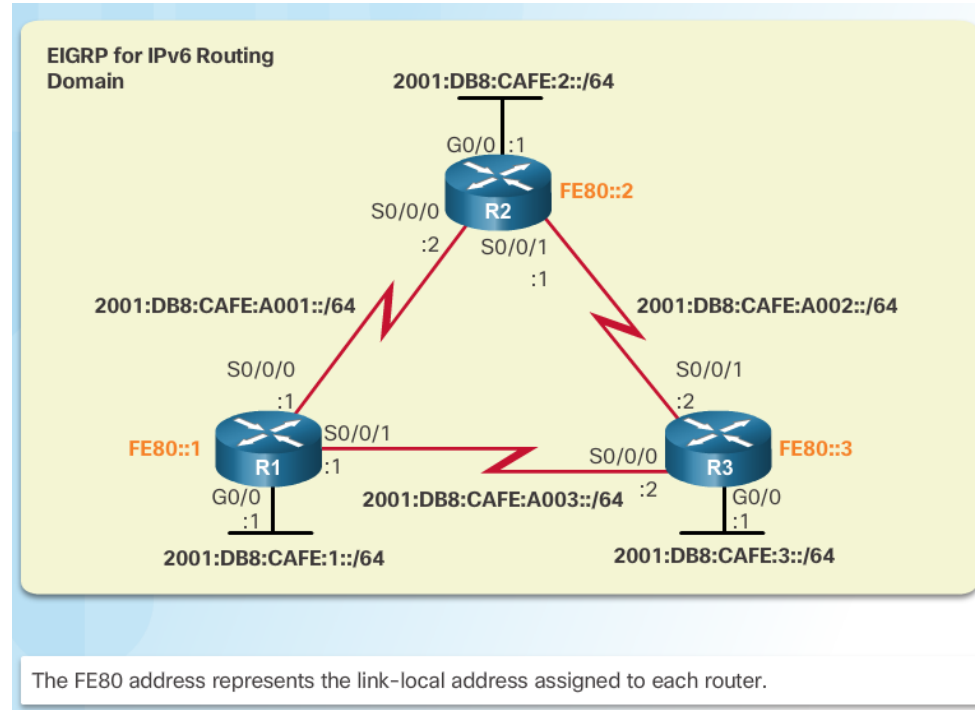

# Analyze an IPv6 Routing Table

## Directly Connected Entries

```
R1# show ipv6 route
<output on...
C 2001:DB8:CAFE:A001::/64 [0/0]
via Serial0/0/0, directly connected
L 2001:DB8:CAFE:A001::1/128 [0/0]
via Serial0/0/0, receive
D 2001:DB8:CAFE:A002::/64 [90/3523840]
via FE80::3, Serial0/0/1
C 2001:DB8:CAFE:A003::/64 [0/0]
via Serial0/0/1, directly connected
L 2001:DB8:CAFE:A003::1/128 [0/0]
via Serial0/0/1, receive
L FF00::/8 [0/0]
via Null0, receive
```

- Use the **show ipv6 route** command to display the IPv6 routing table.
- The directly connected route entries include the following:
  - Route source – How the route was learned. Directly connected indicated with a C and L for local route.
  - Directly connected network address.
  - Administrative distance – Trustworthiness of the route (lower more trustworthy).
  - Metric – Value assigned to reach the network (lower is preferred route).
  - Outgoing interface – Exit interface used to forward packet.

# Analyze an IPv6 Routing Table

## Remote IPv6 Network Entries

```
R1# show ipv6 route
<output omitted>
D 2001:DB8:CAFE:3::/64 [90/2170112]
  via FE80::3, Serial0/0/1
  via GigabitEthernet0/0, receive
  2001:DB8:CAFE:2::/64 [90/3524096]
  via FE80::3, Serial0/0/1
C 2001:DB8:CAFE:A001::/64 [0/0]
  via Serial0/0/0, directly connected
L 2001:DB8:CAFE:A001::1/64 [0/0]
  via FE80::3, Serial0/0/1
D 2001:DB8:CAFE:2::/64 [90/3524096]
  via GigabitEthernet0/0, receive
  2001:DB8:CAFE:1::/64 [90/3524096]
  via FE80::3, Serial0/0/1
```

The diagram illustrates the components of a remote IPv6 route entry from the 'show ipv6 route' command. The entry shown is 'D 2001:DB8:CAFE:3::/64 [90/2170112]'. Callouts identify the following fields:

- Route Source:** Points to the 'D' code.
- Destination Network:** Points to the destination prefix '2001:DB8:CAFE:3::/64'.
- Administrative Distance:** Points to the first number in the brackets, '90'.
- Metric:** Points to the second number in the brackets, '2170112'.
- Next Hop:** Points to the next hop IP address 'FE80::3'.
- Outgoing Interface:** Points to the outgoing interface 'Serial0/0/1'.

- The remote IPv6 route entries also include the following:
  - Route source – How the route was learned. Common codes include O (OSPF), D (EIGRP), R (RIP), and S (Static route).
  - Next hop - Identifies the IPv6 address of the next router to forward the packet to.
- The IPv6 router lookup process:
  - Examines level 1 network routes for the best match.
  - Longest match is the best match.

# 3.4 Chapter Summary

## Chapter 3: Dynamic Routing

- Explain the function of dynamic routing protocols.
- Implement RIPv2.
- Determine the route source, administrative distance, and metric for a given route.

